



WEATHER RESISTANT ACCESS DOOR

Model WR

KEES weather resistant access doors offer safe, easy access to the inside of HVAC housings, walls and ceilings. The foam rubber bulb gasket provides an airtight, weather resistant seal to prevent corrosion. Two inch thick insulated double wall doors create a thermal barrier. These doors feature handles that work from the inside and outside.



**WEATHER RESISTANT DOOR MODEL WR
(DOOR SHOWN WITH LOCKING HANDLE)**

STANDARD SIZES

WIDTH X HEIGHT
12 X 12
14 X 14
18 X 18
20 X 24
20 X 30
22 X 30
22 X 36
24 X 24
24 X 30
24 X 36
24 X 48
30 X 30
30 X 36
36 X 36
36 X 48
48 X 48

Other sizes available upon request.



Minimum door size is 8" x 8".

Maximum door size is 48" x 48".



WEATHER RESISTANT ACCESS DOOR

Model WR

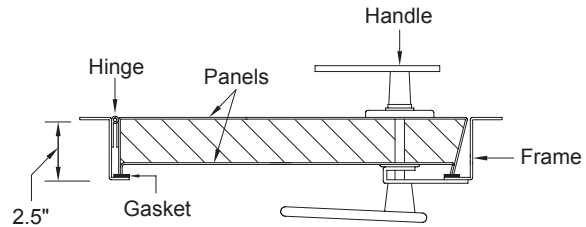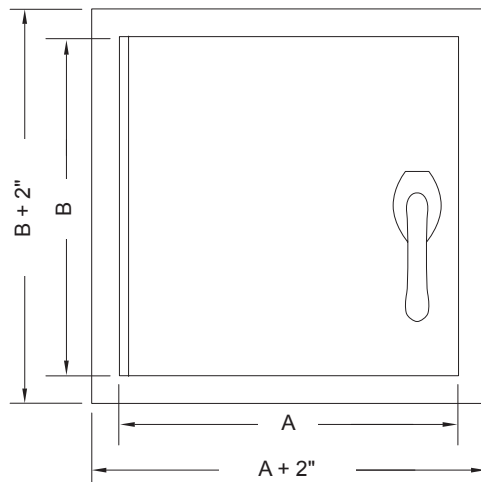

QTY	SIZE A X B	WALL OPENING	NUMBER OF HANDLES
	12 X 12	12.375 X 12.375	1
	14 X 14	14.375 X 14.375	1
	18 X 18	18.375 X 18.375	1
	20 X 24	20.375 X 24.375	1
	20 X 30	20.375 X 30.375	2
	22 X 30	22.375 X 30.375	2
	22 X 36	22.375 X 36.375	2
	24 X 24	24.375 X 24.375	1
	24 X 30	24.375 X 30.375	2
	24 X 36	24.375 X 36.375	2
	24 X 48	24.375 X 48.375	2
	30 X 30	30.375 X 30.375	2
	30 X 36	30.375 X 36.375	2
	36 X 36	36.375 X 36.375	2
	36 X 48	36.375 X 48.375	4
	48 X 48	48.375 X 48.375	4

SPECIFICATIONS

16-gauge door frame*
20-gauge door panels*
2" fiberglass insulation
Foam rubber bulb gasket
Handles work from outside and inside
Stainless steel piano hinge
White painted finish

Note: Hinge mounted on "B" side

* Standard material: Steel frame
and aluminum panels

OPTIONS

MATERIAL

- ☐ Steel / Aluminum (Std.)
☐ 304 SS

HINGE AND LATCHES

- ☐ Non-Locking Handle (Std.)
☐ Locking Handle

To maintain our policy of continuous product development, we reserve the right to change prices, specifications, ratings, and dimensions without notice or obligation.

Project/Location		KEES INCORPORATED 400 South Industrial Drive Elkhart Lake, WI 53020 Ph: 920.876.3391 F: 920.876.3065 www.kees.com	
Engineer/Architect			
Contractor			
Representative			
		Date	