



KITCHEN EXHAUST GREASE DUCT ACCESS DOOR

Models KEDU and KEDU-R

KEES kitchen grease exhaust duct access doors provide efficient access to the interior of welded grease ducts to facilitate inspection and cleaning and help prevent dangerous grease buildup. A ceramic fiber gasket maintains a greaseproof, fire-tight seal and allows use with temperatures up to 2300°F. Bolted to the side or top of ducts, these UL-listed doors meet NFPA-96 requirements and provide quick, easy installation with no welding required.



STANDARD MODEL KEDU GREASE DUCT DOOR

STANDARD SIZES (RECTANGULAR DUCT)

WIDTH X HEIGHT
5.5 X 8.5
5.5 X 13.5
5.5 X 21.5
6 X 6
7 X 7
7 X 12
7 X 20
12 X 12
12 X 20
16 X 20
20 X 20

Other sizes available upon request.



ROUND DUCT MODEL KEDU-R

STANDARD SIZES (ROUND DUCT)



WIDTH X HEIGHT
5 X 5.25
5 X 11.25
5 X 17.25
8 X 8.25
8 X 11.25
8 X 17.25
8 X 23.25
11 X 17.25
11 X 23.25
17 X 17.25
17 X 23.25

Other sizes available upon request.



UL LISTED GREASE DUCT ACCESS DOOR

Model KEDU For Rectangular Duct

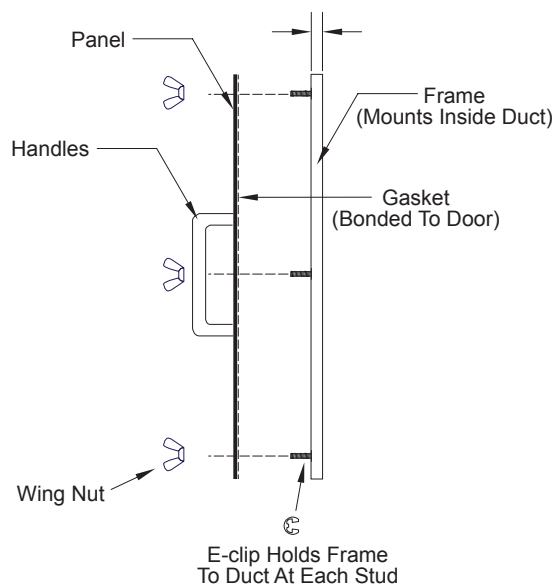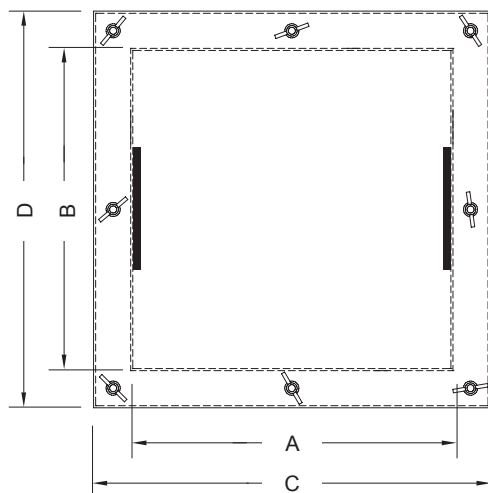

QTY	SIZE A X B*	FLANGE SIZE C X D
	5.5 X 8.5	7 X 10
	5.5 X 13.5	7 X 15
	5.5 X 21.5	7 X 23
	6 X 6	8 X 8
	7 X 7	10 X 10
	7 X 12	10 X 15
	7 X 20	10 X 23
	12 X 12	15 X 15
	12 X 20	15 X 23
	16 X 20	19 X 23
	20 X 20	23 X 23

*A X B dimension is also the duct opening size

SPECIFICATIONS

16-gauge door frame
16-gauge door panel
Ceramic fiber gasket (2300° F)
1/4" weld studs with wing nuts
Mill finish



OPTIONS

MATERIAL

- ☐ Galvanized Steel (Std.)
- ☐ 304 SS

STUDS

- ☐ 1" Long (Std.)
- ☐ 4" Long (accommodates zero clearance duct wrap)



To maintain our policy of continuous product development, we reserve the right to change prices, specifications, ratings, and dimensions without notice or obligation.

Project/Location		KEES INCORPORATED 400 South Industrial Drive Elkhart Lake, WI 53020 Ph: 920.876.3391 F: 920.876.3065 www.kees.com	
Engineer/Architect			
Contractor			
Representative			
		Date	



UL LISTED GREASE DUCT ACCESS DOOR

Model KEDU-R For Round Duct

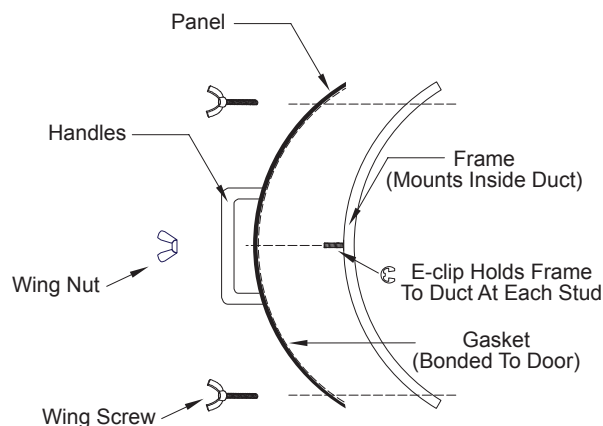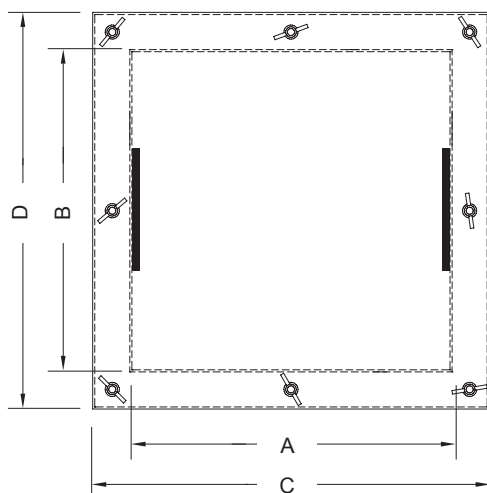

QTY	SIZE A X B*	FLANGE SIZE C X D	MINIMUM DUCT DIAMETER	DUCT DIAMETER
	5 X 5.25	6.5 X 6.75	8	
	5 X 11.25	6.5 X 12.75	8	
	5 X 17.25	6.5 X 18.75	8	
	8 X 8.25	9.5 X 9.75	12	
	8 X 11.25	9.5 X 12.75	12	
	8 X 17.25	9.5 X 18.75	12	
	8 X 23.25	9.5 X 24.75	12	
	11 X 17.25	12.5 X 18.75	18	
	11 X 23.25	12.5 X 24.75	18	
	17 X 17.25	18.5 X 18.75	24	
	17 X 23.25	18.5 X 24.75	24	

*A X B dimension is also the duct opening size

SPECIFICATIONS

16-gauge door frame
16-gauge door panel
Ceramic fiber gasket (2300° F)
1/4" weld studs with wing nuts
Mill finish



OPTIONS

MATERIAL

- ☐ Galvanized Steel (Std.)
- ☐ 304 SS

STUDS

- ☐ 1" Long (Std.)
- ☐ 4" Long (accommodates zero clearance duct wrap)

To maintain our policy of continuous product development, we reserve the right to change prices, specifications, ratings, and dimensions without notice or obligation.

Project/Location		KEES INCORPORATED 400 South Industrial Drive Elkhart Lake, WI 53020 Ph: 920.876.3391 F: 920.876.3065 www.kees.com	
Engineer/Architect			
Contractor			
Representative			
		Date	