



SECURITY ACCESS PANELS

Model SSAP, HSAP and MSAP

KEES security access panels in standard-, high- and maximum-security versions provide protected access to critical areas in a wide range of applications. Heavy-duty steel construction ensures long-lasting performance and prevents unwanted access for all security needs.



MODEL SSAP STANDARD SECURITY



MODEL HSAP HIGH SECURITY



MODEL MSAP MAXIMUM SECURITY

LOCK ASSEMBLY OPTIONS



Pinned Allen Head



Cylinder Lock



Cylinder Dead Bolt Lock Or Prep For Lock By Others






Detention Lock Or Prep For Lock By Others




STANDARD SECURITY ACCESS PANEL

Model SSAP

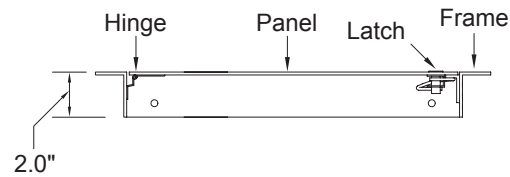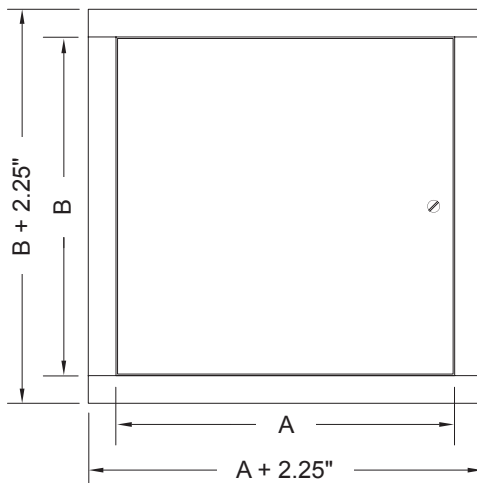

OPTIONAL
SSAP-RR



OPTIONAL
Drywall Bead

QTY	DOOR SIZE A X B	WALL OPENING	NUMBER OF LATCHES (SSAP)	NUMBER OF LATCHES (SSAP-RR)	HINGE LOCATION (LEFT OR RIGHT)*
	8 X 8	8.5 X 8.5	1	2	
	10 X 10	10.5 X 10.5	1	2	
	12 X 12	12.5 X 12.5	1	2	
	14 X 14	14.5 X 14.5	3	5	
	16 X 16	16.5 X 16.5	4	5	
	18 X 18	18.5 X 18.5	4	5	
	24 X 24	24.5 X 24.5	7	8	
	24 X 36	24.5 X 36.5	9	10	
	24 X 48	24.5 X 48.5	10	12	
	30 X 30	30.5 X 30.5	10	11	
	36 X 36	36.5 X 36.5	13	14	
	36 X 48	36.5 X 48.5	14	16	

SPECIFICATIONS

12-gauge door frame
12-gauge door panel
Pinned allen head security cam latch
Concealed piano hinge
White painted finish
1/4" mounting holes in frame

Note: Hinge mounted on "B" side

*Advise if hinge is on left or right side, facing door from outside.

OPTIONS

MATERIAL

- ☐ Steel (Std.)
- ☐ 304 SS (Satin Finish)
- ☐ 316 SS (Satin Finish)

LATCH

- ☐ Pinned Allen Head Latch (Std.)
- ☐ Cylinder Lock (1 per door)
- ☐ Dead Bolt Lock (1 per door)
- ☐ Prep for Dead Bolt Lock by Others (1 per door)
- ☐ Detention Lock (1 per door)
- ☐ Prep for Detention Lock by Others (1 per door)

MOUNTING

- ☐ Mounting Holes in Frame (Std.)
- ☐ Factory Installed Masonry Anchors
- ☐ Drywall Bead in Lieu of Flanged Frame

OTHER

- ☐ Risk Resistant Model SSAP-RR
(3/8" radius on door and flange)



To maintain our policy of continuous product development, we reserve the right to change prices, specifications, ratings, and dimensions without notice or obligation.

Project/Location		KEES INCORPORATED 400 South Industrial Drive Elkhart Lake, WI 53020 Ph: 920.876.3391 F: 920.876.3065 www.kees.com	
Engineer/Architect			
Contractor			
Representative			
		Date	



HIGH SECURITY ACCESS PANEL

Model HSAP

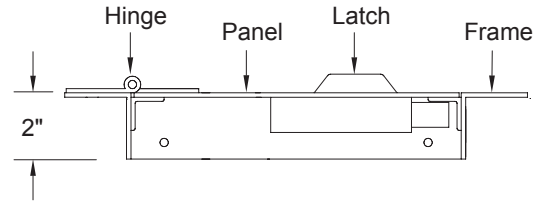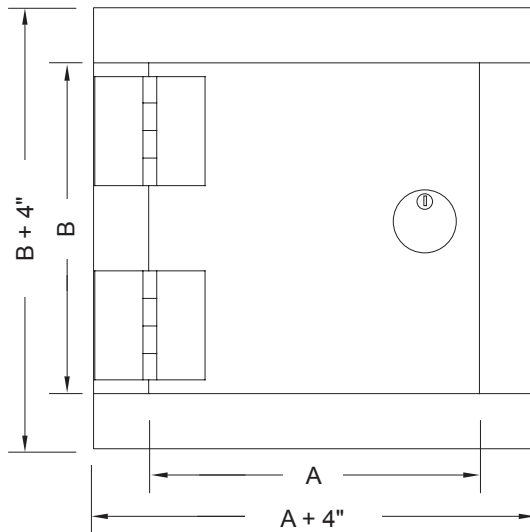

QTY	SIZE A X B	WALL OPENING	NUMBER OF LATCHES	HINGE LOCATION (LEFT OR RIGHT)*
	8 X 8	8.75 X 8.75	1	
	10 X 10	10.75 X 10.75	1	
	12 X 12	12.75 X 12.75	1	
	14 X 14	14.75 X 14.75	1	
	16 X 16	16.75 X 16.75	1	
	18 X 18	18.75 X 18.75	1	
	24 X 24	24.75 X 24.75	1	
	24 X 36	24.75 X 36.75	2	
	24 X 48	24.75 X 48.75	2	
	30 X 30	30.75 X 30.75	2	
	36 X 36	36.75 X 36.75	2	
	36 X 48	36.75 X 48.75	2	

SPECIFICATIONS

1/8" angle frame
 10-gauge door panel
 Key operated cylinder dead bolt lock
 Heavy duty butt hinges**
 White painted finish
 1/4" mounting holes in frame

Note: Hinges mounted on "B" side

** Three hinges if height over 36"

*Advise if hinges are on left or right side, facing door from outside.

OPTIONS

LATCH

- ☐ Dead Bolt Lock (Std.)
- ☐ Prep for Dead Bolt Lock by Others (1 per door)
- ☐ Detention lock (1 per door)
- ☐ Prep for Detention Lock by Others (1 Per door)

MOUNTING

- ☐ Mounting Holes in Frame (Std.)
- ☐ Factory Installed Masonry Anchors



To maintain our policy of continuous product development, we reserve the right to change prices, specifications, ratings, and dimensions without notice or obligation.

Project/Location		KEES INCORPORATED 400 South Industrial Drive Elkhart Lake, WI 53020 Ph: 920.876.3391 F: 920.876.3065 www.kees.com	
Engineer/Architect			
Contractor			
Representative			
		Date	



MAXIMUM SECURITY ACCESS PANEL

Model MSAP

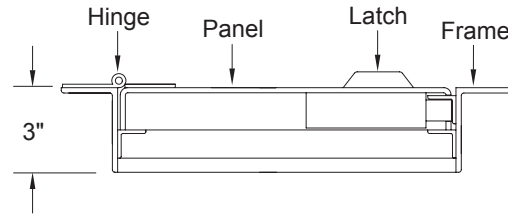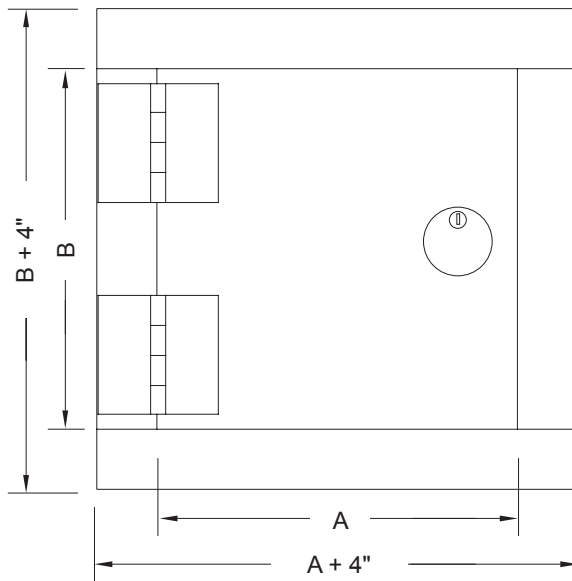

QTY	SIZE A X B	WALL OPENING	NUMBER OF LATCHES	HINGE LOCATION (LEFT OR RIGHT)*
	8 X 8	8.75 X 8.75	1	
	10 X 10	10.75 X 10.75	1	
	12 X 12	12.75 X 12.75	1	
	14 X 14	14.75 X 14.75	1	
	16 X 16	16.75 X 16.75	1	
	18 X 18	18.75 X 18.75	1	
	24 X 24	24.75 X 24.75	1	
	24 X 36	24.75 X 36.75	2	
	24 X 48	24.75 X 48.75	2	
	30 X 30	30.75 X 30.75	2	
	36 X 36	36.75 X 36.75	2	
	36 X 48	36.75 X 48.75	2	

*Advise if hinges are on left or right side, facing door from outside.

OPTIONS

LATCH

- ☐ Dead Bolt Lock (Std.)
- ☐ Prep for Dead Bolt Lock by Others (1 per door)
- ☐ Detention Lock (1 per door)
- ☐ Prep for Detention Lock by Others (1 Per door)

To maintain our policy of continuous product development, we reserve the right to change prices, specifications, ratings, and dimensions without notice or obligation.

SPECIFICATIONS

7-gauge door frame
7-gauge door panel
Key operated cylinder dead bolt lock
Heavy duty butt hinges**
White painted finish
Factory installed masonry anchors

Note: Hinges mounted on "B" side

** Three hinges if height over 36"

Project/Location		KEES INCORPORATED 400 South Industrial Drive Elkhart Lake, WI 53020 Ph: 920.876.3391 F: 920.876.3065 www.kees.com	
Engineer/Architect			
Contractor			
Representative			
		Date	