



# Architectural Wall / Sill Bar Grilles

## CORE STYLES

### Core Styles

1300-25 \*  
Bars 1/4" O.C.


1300-38 \*  
Bars 3/8" O.C.

1300-50 \*  
Bars 1/2" O.C.

1900-44 \*\*  
Bars 7/16" O.C.

\* 1/8" x 1/2" Bars.  
\*\* 3/16" Bars, Aluminum Only.

### 0 DEGREE DEFLECTION



Support Bars 8" O.C.

### Core Styles

1315-25 \*  
Bars 1/4" O.C.

1315-38 \*  
Bars 3/8" O.C.

1315-50 \*  
Bars 1/2" O.C.

1915-44 \*\*  
Bars 7/16" O.C.

Support Bars 8" O.C.

### 15 DEGREE DEFLECTION



### Core Styles

1315F-25 \*  
Bars 1/4" O.C.

1315F-38 \*  
Bars 3/8" O.C.

1315F-50 \*  
Bars 1/2" O.C.

1915F-44  
Bars 7/16" O.C.

"F" Core Style available in aluminum construction only.

### Core Styles

2500-50  
Bars 1/2" O.C.

2515-50  
Bars 1/2" O.C.

15° Deflection

### 0 or 15 DEGREE DEFLECTION




1/4" x 1/2" Bars.

Support Bars 12" O.C.


## FRAME STYLES

### Flanged Frame Styles FS or FM

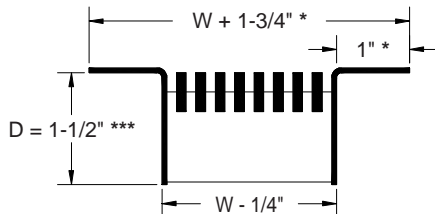

\* 1/2", 3/4", 1-1/2" or Other Flange Widths Also Available.  
\*\*\* 4" with Optional O.B.D.


### Face View FS Frame

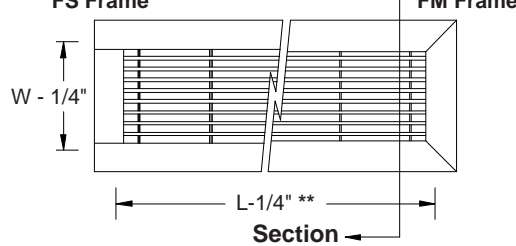

\*\* Overall core length varies for multiple section units based on tolerance of  $\pm 1/32$ " per section.


### Straight Frame

Style S - 1/8" or 1/4" x 1-1/2" Bar (Frame width matches core bar width)




## OPTIONS


### COUNTERSUNK SCREW HOLES / OPPOSED BLADE DAMPER




### FASTENING LUGS / FASTENING LUGS WITH OPPOSED BLADE DAMPER



### DUCT BRACKETS / DUCT BRACKETS WITH OPPOSED BLADE DAMPER

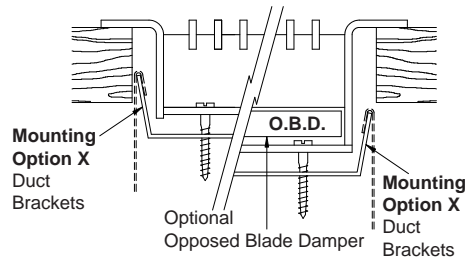

### LOOSE ANGLE FRAME WITH MOUNTING LUGS



Qty.	Listed Size		Core Depth D	# Sect.	Core Style	Core Bar Centers	Frame Style	Sup. Bar Spacing	Material	Mtg. Option	Finish	Damper	Tag
	L	W											

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project					Location								
Engineer					Dwg. No.	SD-WBG							
Architect					Date	05/17							
Contractor													



**KEES INCORPORATED**  
400 S. Industrial Dr.  
Elkhart Lake, WI 53020  
Phone: (920) 876-3391  
Fax: (920) 876-3065  
Website: www.kees.com



# Architectural Floor Bar Grilles

## CORE STYLES


Core Styles

1300-25 \*  
Bars 1/4" O.C.

1300-38 \*  
Bars 3/8" O.C.

1900-44 \*\*  
Bars 7/16" O.C.

0 DEGREE  
DEFLECTION



\* 1/8" x 1/2" Bars.  
\*\* 3/16" Bars, Aluminum Only.

Support  
Bars 6" O.C.

Core Styles


1315F-25 \*  
Bars 1/4" O.C.

1315F-38 \*  
Bars 3/8" O.C.

1915F-44  
Bars 7/16" O.C.,  
Width Limitations  
Apply

"F" Core Style  
available in aluminum  
construction only.

15 DEGREE  
DEFLECTION




Support  
Bars  
6" O.C.

Core Styles

2500-50  
Bars 1/2" O.C.


0 DEGREE  
DEFLECTION



1/4" x 1/2" Bars. Support  
Bars  
6" O.C.


## FRAME STYLES

Flanged Frame Style FF

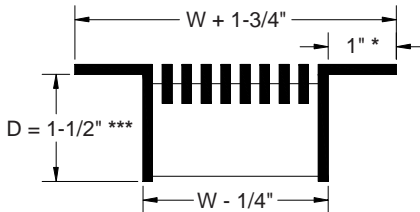

\* 1/2", 3/4", 1-1/2" or Other  
Flange Widths Also Available.  
\*\*\* 4" with Optional O.B.D.


FACE VIEW

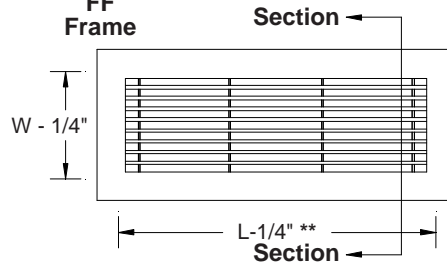

\*\* Overall core length varies for multiple section units based on tolerance of  $\pm 1/32"$  per section.

Straight Frame

Style S - 1/8" or 1/4" x 1-1/2" Bar  
(Frame width matches core bar width)




## OPTIONS

COUNTERSUNK SCREW HOLES /  
OPPOSED BLADE DAMPER

Mounting Option A

Countersunk Screw Holes




Optional Opposed  
Blade Damper

OPPOSED BLADE DAMPER  
WITH FASTENING LUGS

Mounting Option G

Fastening Lugs




Optional  
Opposed Blade  
Damper

FASTENING LUGS / LOOSE ANGLE FRAME  
WITH MOUNTING LUGS

Mounting Option G

Fastening Lugs

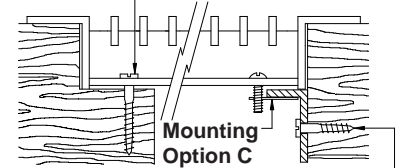

Mounting  
Option C  
Loose Angle  
Fasteners  
With Cam Nuts  
By Others

Qty.	Listed Size		Core Depth D	# Sect.	Core Style	Core Bar Centers	Frame Style	Sup. Bar Spacing	Material	Mtg. Option	Finish	Damper	Tag
	L	W											

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project				Location			
Engineer				Dwg. No.	SD-FBG		
Architect				Date	05/17		
Contractor							




**KEES INCORPORATED**  
400 S. Industrial Dr.  
Elkhart Lake, WI 53020  
Phone: (920) 876-3391  
Fax: (920) 876-3065  
Website: www.kees.com




# Architectural Gym Bar Grilles


## CORE STYLES

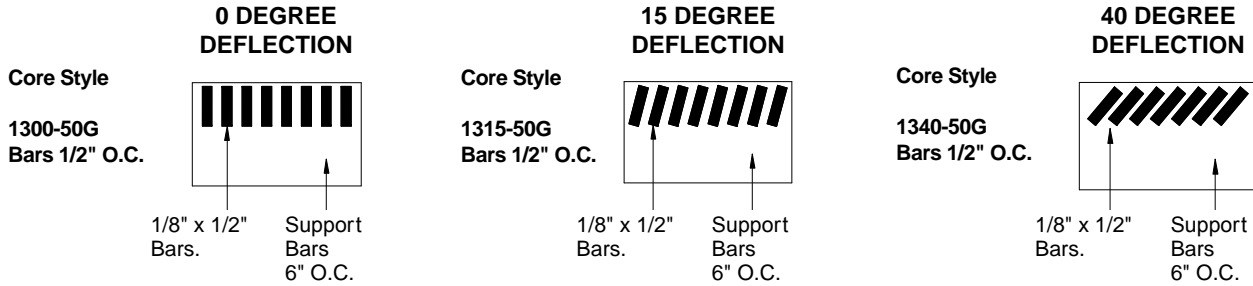

## FRAME STYLES

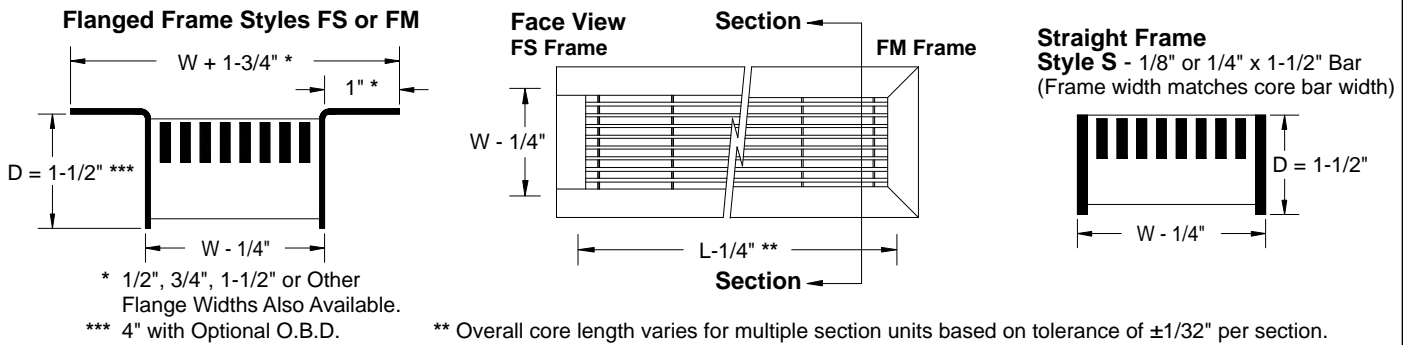

## OPTIONS

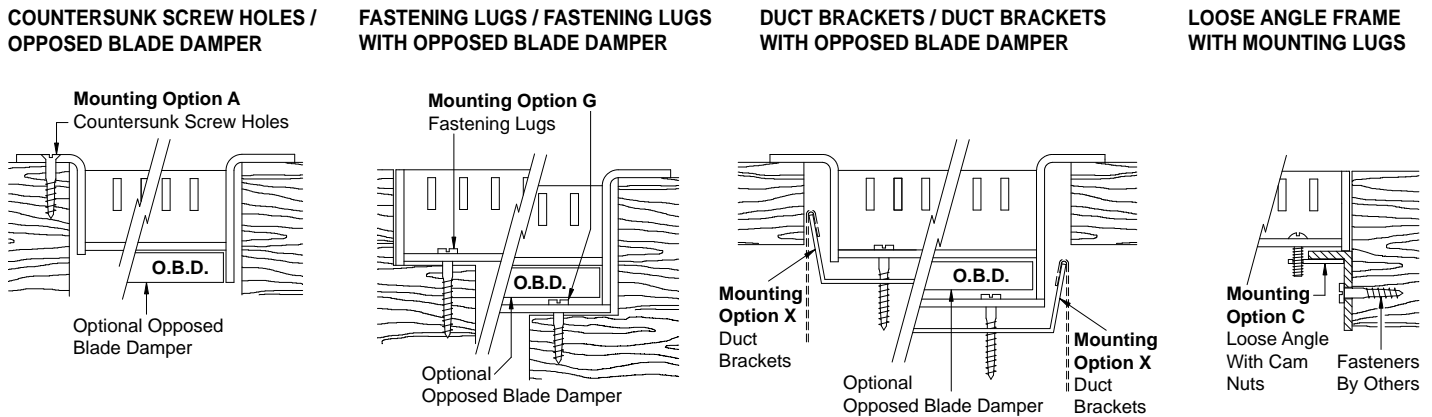

Qty.	Listed Size		Core Depth D	# Sect.	Core Style	Core Bar Centers	Frame Style	Sup. Bar Spacing	Material	Mtg. Option	Finish	Damper	Tag
	L	W											

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

<b>Project</b>					<b>Location</b>		
<b>Engineer</b>					<b>Dwg. No.</b>	<b>SD-GBG</b>	<p><b>KEES INCORPORATED</b> 400 S. Industrial Dr. Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com</p>
<b>Architect</b>					<b>Date</b>	<b>04/15</b>	
<b>Contractor</b>							