

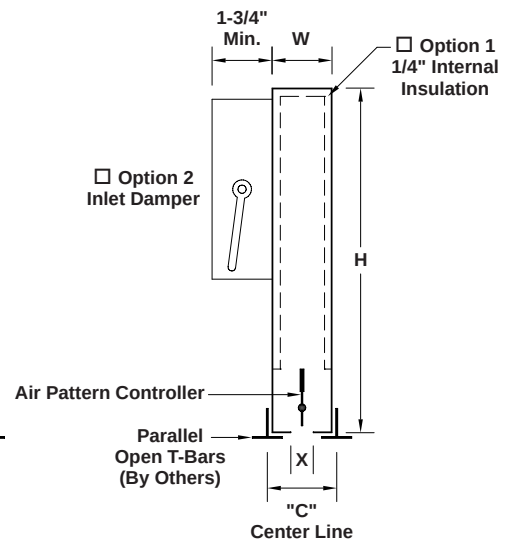







1-Slot Model



MODEL	SLOT WIDTH X	W	C
K-50-1	1/2"	1-5/8"	1-7/8"
K-75-1	3/4"	1-7/8"	2-1/8"
K-100-1	1"	2-1/8"	2-3/8"
K-150-1	1-1/2"	2-5/8"	2-7/8"

□ **Standard**
No side T's or
clips furnished



Finish: Diffuser face and pattern controller flat black.

* Specify inlet side or side opposite inlet if ordering Options 5, 8, or 10.



To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.



KEES INCORPORATED
400 S. Industrial Dr.
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com

MODEL "K" DIFFUSER WITH ADJUSTABLE BLADE

2-Slot Model

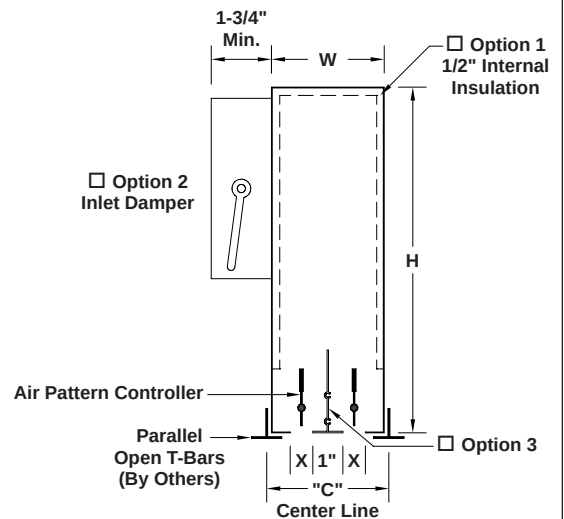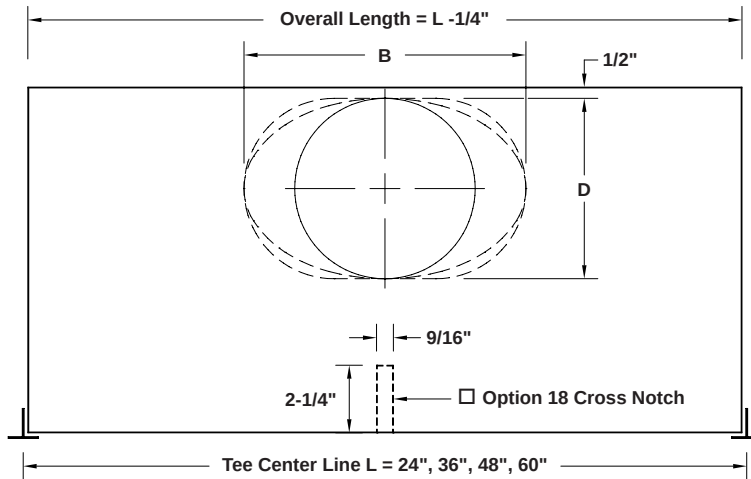


NOMINAL INLET SIZE	B	D	H
6" RD.	5-7/8"	5-7/8"	11-5/8"
8" RD.	7-7/8"	7-7/8"	
10" OV.	11-1/2"	8"	
12" SLOT	14-1/2"	8"	13-5/8"
10" RD.	9-7/8"	9-7/8"	
12" OV.	13-7/8"	9-9/16"	
12" RD.	11-7/8"	11-7/8"	15-5/8"

MODEL	SLOT WIDTH X	W	C
K-50-2	1/2"	3-1/8"	3-3/8"
K-75-2	3/4"	3-5/8"	3-7/8"
K-100-2	1"	4-1/8"	4-3/8"
K-150-2	1-1/2"	5-1/8"	5-3/8"


Material: 24 gauge zinc coated steel. Pattern controller extruded aluminum with felt wiper seal.

Finish: Diffuser face and pattern controller flat black, tees are white.

ACCESSORY OPTIONS



☐ Option 3
Factory installed
Center T




☐ Option 4
Slot provided in ends
to fit astride ceiling
grid T-bar (by others)




☐ Option 5
One side T
furnished *


Center T
Extension




☐ Option 6
2-slot one-way blow only -
T-extension is added to
fit over existing grid
T-bar (by others)
Slot provided in ends




☐ Option 7
Both side T's
furnished



☐ Option 8
One pair of
TC clips furnished *



☐ Option 11
Frame
screwed onto
plenum lip using
pan head screws.
Off-white finish.
Shipped loose.



☐ Option 12
Frame for concealed
fastening.
Off-white finish.
Shipped loose.
Field Drilled.

☐ Option 9
Both pairs of
TC clips
furnished

☐ Option 10
One pair of
TC clips and one
side T furnished *

Inlet Collar Location: Inlet collar may be offset for packaging purposes.

* Specify inlet side or side opposite inlet if ordering Options 5, 8, or 10.

Quantity	Model	Length L	Height H	Inlet Size	Options	Tag

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.



Project	Location		
Engineer			
Architect	Dwg. No.	Diff. KS-2	
Contractor	Date	05/10	



KEES INCORPORATED
400 S. Industrial Dr.
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com

MODEL "KLP - LOW PROFILE" DIFFUSER WITH ADJUSTABLE BLADE


1-Slot Model

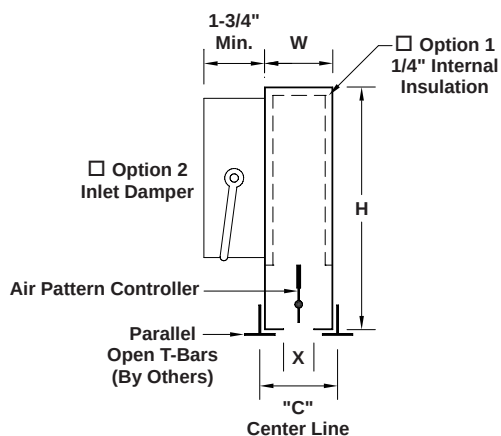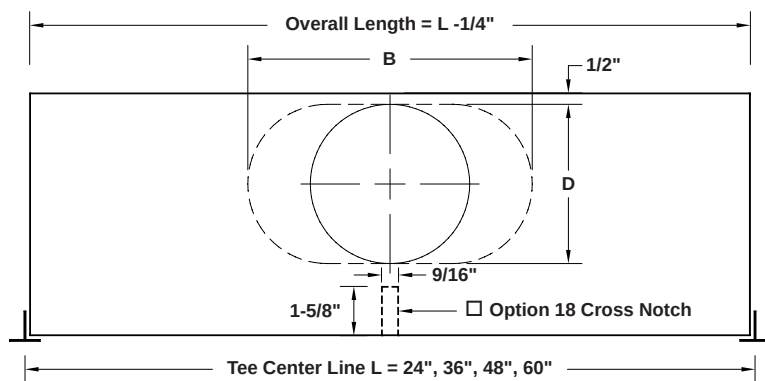


NOMINAL INLET SIZE	B	D	H
5" RD.	4-7/8"	4-7/8"	8"
6" SLOT	6-1/4"	5-1/4"	
8" SLOT	9-3/8"	5-1/4"	
10" SLOT	12-1/2"	5-1/4"	
12" SLOT	15-5/8"	5-3/4"	

MODEL	SLOT WIDTH X	W	C
KLP-50-1	1/2"	1-5/8"	1-7/8"
KLP-75-1	3/4"	1-7/8"	2-1/8"
KLP-100-1	1"	2-1/8"	2-3/8"
KLP-150-1	1-1/2"	2-5/8"	2-7/8"


ACCESSORY OPTIONS




☐ **Standard**
No side T's or
clips furnished




☐ Option 5
One side T
furnished *




☐ Option 7
Both side T's
furnished




☐ Option 8
One pair of
TC clips
furnished *




☐ Option 9
Both pairs of
TC clips
furnished



☐ Option 10
One pair of
TC clips and one
side T furnished *



☐ **Option 11**
Frame
screwed onto
plenum lip using
pan head screws.
Off-white finish.
Shipped loose.



☐ **Option 12**
Frame for concealed fastening.
Off-white finish.
Shipped loose.
Field Drilled.

Material: 24 gauge zinc coated steel. Pattern controller extruded aluminum with felt wiper seal.

Finish: Diffuser face and pattern controller flat black.

Inlet Collar Location: Inlet collar may be offset for packaging purposes.

* *Specify inlet side or side opposite inlet if ordering Options 5, 8, or 10.*

[illegible]


To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project				Location	 KEES INCORPORATED 400 S. Industrial Dr. Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com
Engineer					
Architect		Dwg. No.	Diff. KLP-1		
Contractor		Date	05/10		



KEES INCORPORATED
400 S. Industrial Dr.
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com

MODEL "KLP - LOW PROFILE" DIFFUSER WITH ADJUSTABLE BLADE
2-Slot Model

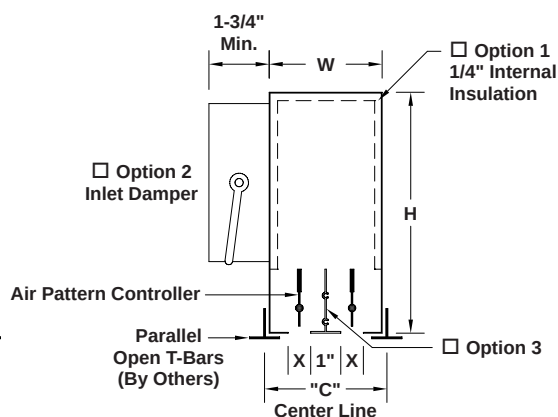


NOMINAL INLET SIZE	B	D	H
5" RD.	4-7/8"	4-7/8"	8"
6" SLOT	6-1/4"	5-1/4"	
8" SLOT	9-3/8"	5-1/4"	
10" SLOT	12-1/2"	5-1/4"	
12" SLOT	15-5/8"	5-3/4"	

MODEL	SLOT WIDTH X	W	C
KLP-50-2	1/2"	3-1/8"	3-3/8"
KLP-75-2	3/4"	3-5/8"	3-7/8"
KLP-100-2	1"	4-1/8"	4-3/8"
KLP-150-2	1-1/2"	5-1/8"	5-3/8"


Material: 24 gauge zinc coated steel. Pattern controller extruded aluminum with felt wiper seal.

Finish: Diffuser face and pattern controller flat black, tees are white.

ACCESSORY OPTIONS



☐ Option 6
2-slot one-way blow only –
T-extension is added to
fit over existing grid
T-bar (by others)
Slot provided in ends



☐ **Option 12**
Frame for concealed fastening.
Off-white finish.
Shipped loose.
Field Drilled.

☐ Option 10
One pair of
TC clips and one
side T furnished *

Inlet Collar Location: Inlet collar may be offset for packaging purposes.



* Specify inlet side or side opposite inlet if ordering Options 5, 8, or 10.

[illegible]

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project			Location	 KEES INCORPORATED 400 S. Industrial Dr. Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com
Engineer				
Architect		Dwg. No.	Diff. KLP-2	
Contractor		Date	05/10	


MODEL "K" DIFFUSER WITH ADJUSTABLE BLADE 3-Slot Model

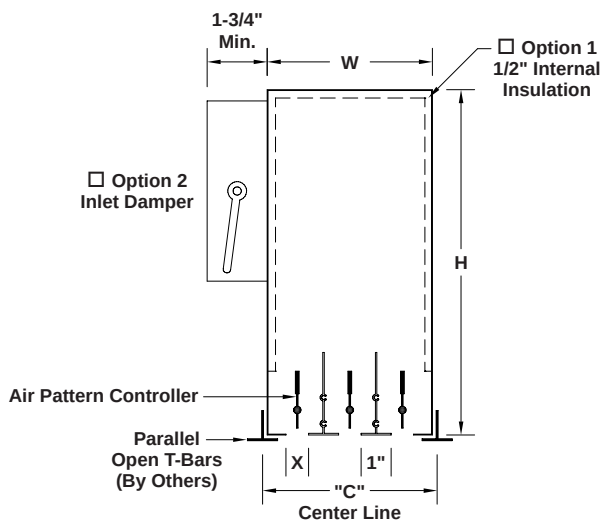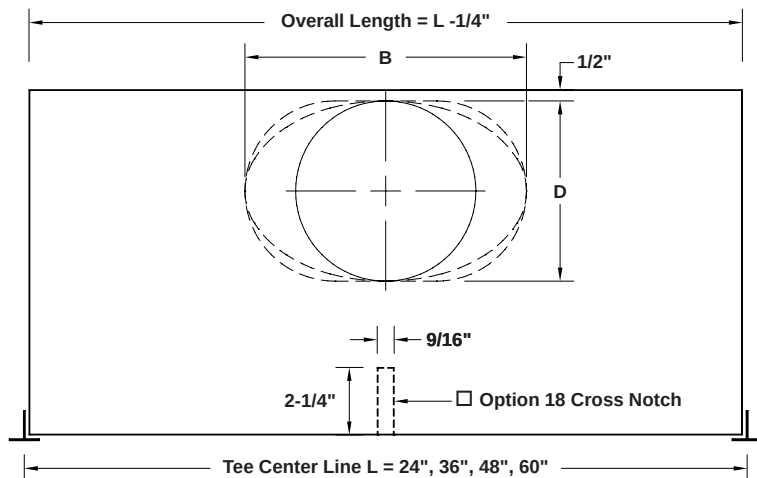


ACCESSORY OPTIONS

NOMINAL INLET SIZE	B	D	H
6" RD.	5-7/8"	5-7/8"	11-5/8"
8" RD.	7-7/8"	7-7/8"	
10" OV.	11-1/2"	8"	
12" SLOT	14-1/2"	8"	
10" RD.	9-7/8"	9-7/8"	13-5/8"
12" OV.	13-7/8"	9-9/16"	
12" RD.	11-7/8"	11-7/8"	15-5/8"


MODEL	SLOT WIDTH X	W	C
K-50-3	1/2"	4-5/8"	4-7/8"
K-75-3	3/4"	5-3/8"	5-5/8"
K-100-3	1"	6-1/8"	6-3/8"
K-150-3	1-1/2"	7-5/8"	7-7/8"




☐ **Standard**
Two Center T's
No side T's or
clips furnished




☐ Option 5
One side T
furnished *




☐ Option 7
Both side T's
furnished




☐ Option 8
One pair of
TC clips
furnished *




☐ Option 9
Both pairs of
TC clips
furnished



☐ Option 10
One pair of
TC clips and one
side T furnished *



□ **Option 11**
Frame
screwed onto
plenum lip using
pan head screws.
Off-white finish.
Shipped loose.



☐ **Option 12**
Frame for concealed fastening.
Off-white finish.
Shipped loose.
Field Drilled.

Material: 24 gauge zinc coated steel. Pattern controller extruded aluminum with felt wiper seal.

Finish: Diffuser face and pattern controller flat black, tees are white.

Inlet Collar Location: Inlet collar may be offset for packaging purposes.


* Specify inlet side or side opposite inlet if ordering Options 5, 8, or 10.

[illegible]









To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project			Location	 KEES INCORPORATED 400 S. Industrial Dr. Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com
Engineer				
Architect		Dwg. No.	Diff. KS-3	
Contractor		Date	05/10	

4-Slot Model

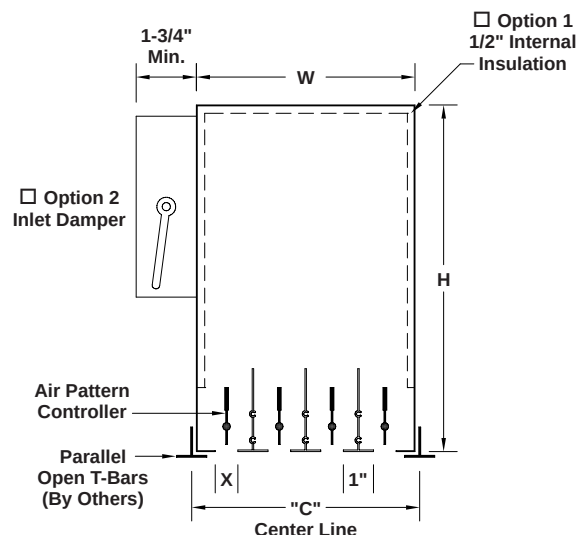

ACCESSORY OPTIONS

			
☐ Standard Three Center T's No side T's or clips furnished	☐ Option 5 One side T furnished *	☐ Option 7 Both side T's furnished	☐ Option 8 One pair of TC clips furnished *
			
☐ Option 9 Both pairs of TC clips furnished	☐ Option 10 One pair of TC clips and one side T furnished *	☐ Option 11 Frame screwed onto plenum lip using pan head screws. Off-white finish. Shipped loose.	☐ Option 12 Frame for concealed fastening. Off-white finish. Shipped loose. Field Drilled.

☐ Option 9 Both pairs of TC clips furnished	☐ Option 10 One pair of TC clips and one side T furnished *	☐ Option 11 Frame screwed onto plenum lip using pan head screws. Off-white finish. Shipped loose.	☐ Option 12 Frame for concealed fastening. Off-white finish. Shipped loose. Field Drilled.
---	---	--	---

Finish: Diffuser face and pattern controller flat black, tees are white.



* Specify inlet side or side opposite inlet if ordering Options 5, 8, or 10.

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.



KEES INCORPORATED
400 S. Industrial Dr.
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com

6 & 8 -Slot Models

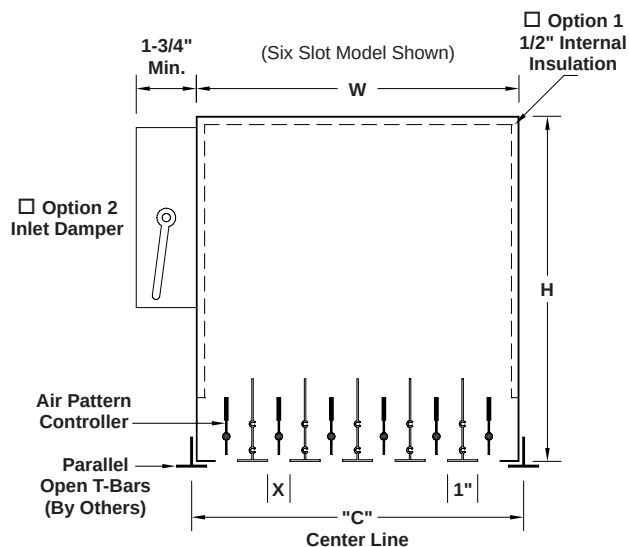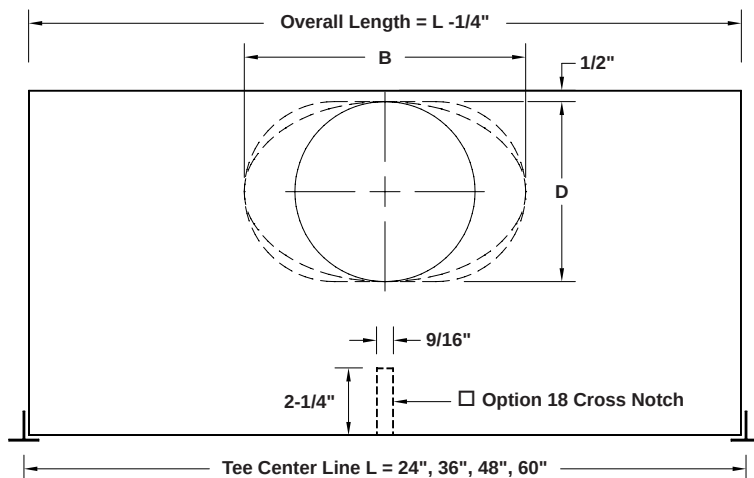


NOMINAL INLET SIZE	B	D	H
8" RD.	7-7/8"	7-7/8"	11-5/8"
10" OV.	11-1/2"	8"	
12" SLOT	14-1/2"	8"	
12" OV.	13-7/8"	9-9/16"	13-5/8"
14" SLOT	16-1/8"	9-7/8"	
16" SLOT	19-5/16"	9-7/8"	
18" SLOT	22-7/16"	9-7/8"	
12" RD.	11-7/8"	11-7/8"	15-5/8"

	MODEL	SLOT WIDTH X	W	C
6 S L O T	K-50-6	1/2"	9-1/8"	9-3/8"
	K-75-6	3/4"	10-5/8"	10-7/8"
	K-100-6	1"	12-1/8"	12-3/8"
	K-150-6	1-1/2"	15-1/8"	15-3/8"
8 S L O T	K-50-8	1/2"	12-1/8"	12-3/8"
	K-75-8	3/4"	14-1/8"	14-3/8"
	K-100-8	1"	16-1/8"	16-3/8"
	K-150-8	1-1/2"	20-1/8"	20-3/8"

Material: 24 gauge zinc coated steel. Pattern controller extruded aluminum with felt wiper seal.

Finish: Diffuser face and pattern controller flat black, tees are white.

ACCESSORY OPTIONS

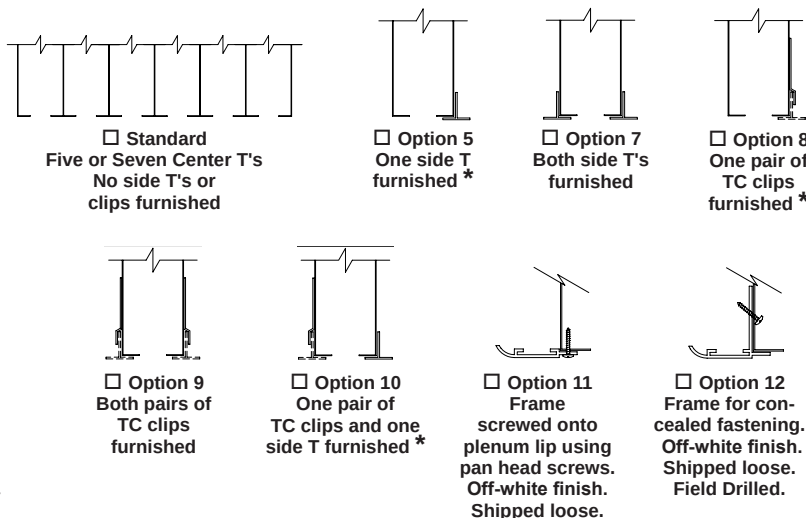

Inlet Collar Location: Inlet collar may be offset for packaging purposes.


* Specify inlet side or side opposite inlet if ordering Options 5, 8, or 10.

[illegible]

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project			Location		
Engineer					KEES INCORPORATED 400 S. Industrial Dr. Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com
Architect		Dwg. No.	Diff. KS-6 & 8		
Contractor		Date	05/10		


MODEL "K" DIFFUSER WITH ADJUSTABLE BLADE 10-Slot Model

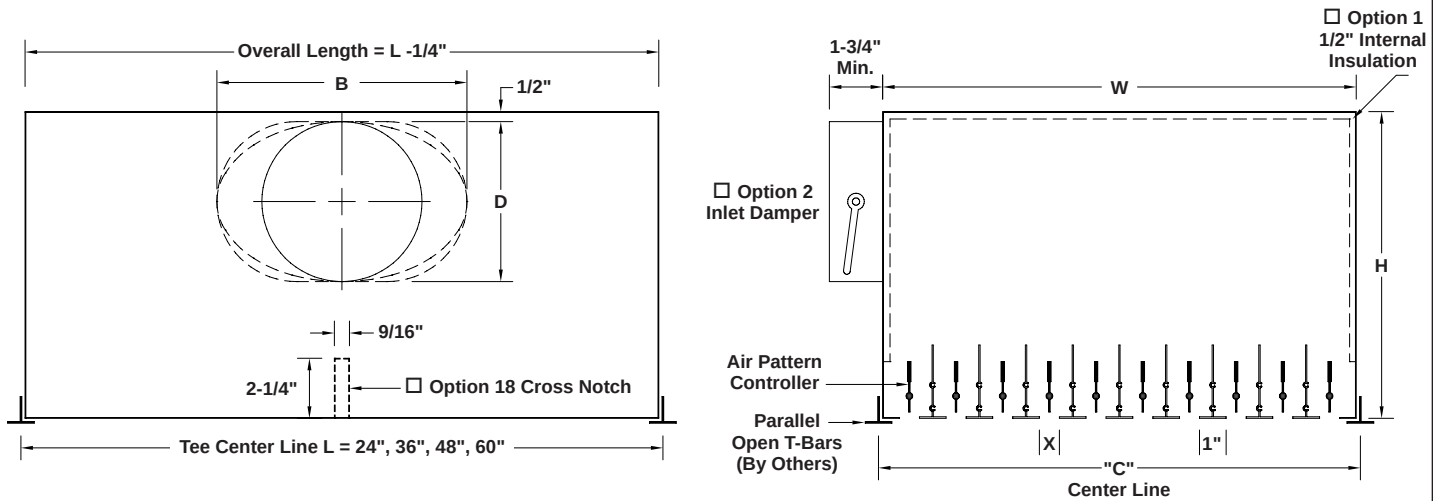

NOMINAL INLET SIZE	B	D	H
10" OV.	11-1/2"	8"	11-5/8"
12" SLOT	14-1/2"	8"	
12" OV.	13-7/8"	9-9/16"	
14" SLOT	16-1/8"	9-7/8"	13-5/8"
2-12" OVALS	13-7/8"	9-9/16"	
2-14" SLOTS	16-1/8"	9-7/8"	
2-16" SLOTS	19-5/16"	9-7/8"	
12" RD.	11-7/8"	11-7/8"	15-5/8"

MODEL	SLOT WIDTH X	W	C
K-50-10	1/2"	15-1/8"	15-3/8"
K-75-10	3/4"	17-5/8"	17-7/8"
K-100-10	1"	20-1/8"	20-3/8"
K-150-10	1-1/2"	25-1/8"	25-3/8"

ACCESSORY OPTIONS

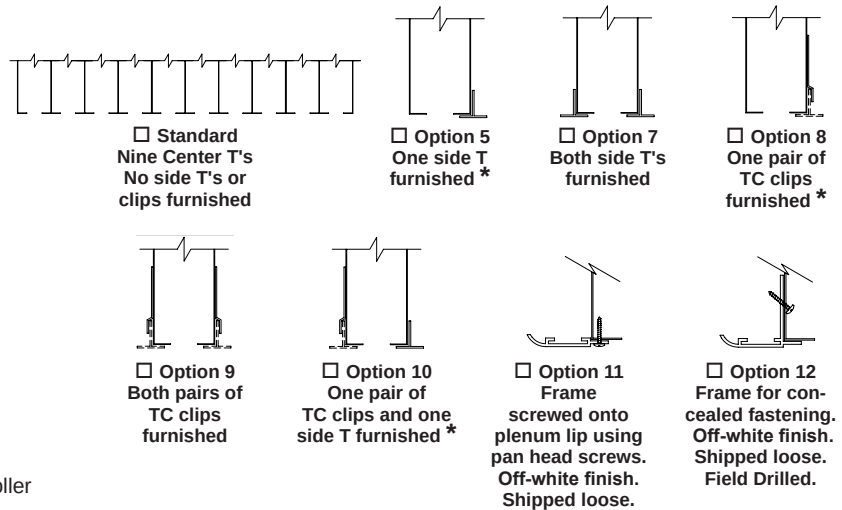

Material: 24 gauge zinc coated steel. Pattern controller extruded aluminum with felt wiper seal.

Finish: Diffuser face and pattern controller flat black, tees are white.

Inlet Collar Location: Inlet collar may be offset for packaging purposes.

* Specify inlet side or side opposite inlet if ordering Options 5, 8, or 10.

Quantity	Model	Length L	Height H	Inlet Size	Options	Tag


To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project	Location	Dwg. No.	Diff. KS-10
Engineer			
Architect		Date	05/10
Contractor			




KEES INCORPORATED
 400 S. Industrial Dr.
 Elkhart Lake, WI 53020
 Phone: (920) 876-3391
 Fax: (920) 876-3065
 Website: www.kees.com

OPTIONS FOR "K" AND "KLP" AIR DIFFUSERS FOR USE WITH 15/16" TEE BAR GRID




☐ **Option 1**
Internal Insulation
Center "T" Extension


☐ **Option 2**
Inlet Damper With
Manual Quadrant




☐ **Option 3**
Factory Installed
Extruded Center T.
On 2 Slot Unit




☐ **Option 4**
Slot Provided In Ends To Fit Astride
Ceiling Grid T-Bar (By Others).
On 2 Slot Unit




☐ **Option 5**
One Side T
Furnished



☐ **Option 6**
2 Slot One-Way Blow Only -
T-Extension Is Added To Fit Over Existing Grid
T-Bar (By Others). Slot Provided In Ends




☐ **Option 7**
Both Side T's
Furnished



☐ **Option 8**
One Pair Of TC Clips
Furnished



☐ **Option 9**
Both Pairs Of TC Clips
Furnished



☐ **Option 10**
One Pair Of TC Clips
And One Side T Fur-
nished



☐ **Option 11**
Flat Extruded Aluminum Frame
Screwed Into Plenum Lip Using
Pan Head Screws On 12" Cen-
ters. Off-white Finish.

FRAMES FOR HARD CEILINGS




☐ **Option 12**
Extruded Aluminum Frame.
No Surface Screws.
Fastened Thru Slot Opening.
Off-white Finish.




☐ **Option 13**
Continuous Run Of Active And Inactive Sections For
Hard Ceiling. Center "T's" Look Continuous With
Options 11 Or 12 Separate Frame Around Perimeter.


☐ **Options 14 and 15**
Configurations For Use With Donn
Fineline, Chicago Metallic, Armstrong
(And Others) Ceilings With 9/16"
Wide Tees. "K" Diffuser Only. See
Separate Documentation For 9/16"
Tee Option Nomenclature.



☐ **Option 16**
Tegular Ceiling
"K" Diffusers Only

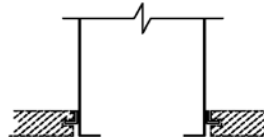

☐ **Option 17**
Splined Ceiling
"K" Diffusers Only

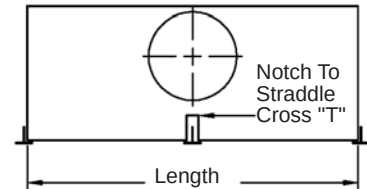


☐ **Option 18**
Cross Notch For Cross "T"



☐ **Option 19**
Combination Sup-
ply-Return Unit. Return
Collar Available.




☐ **Option 20**
Top Inlet.
"K" Diffusers Only.




☐ **Option 21**
Face Operated Damper
Using Wire Hook.



☐ **Option 22**
90 Deg. Angles - Inac-
tive Units Only.



☐ **Option 23**
No Plenum -
Top Open Or Closed.
"K" Diffusers Only.

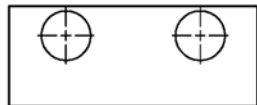

☐ **Option 24**
Multiple Collars In Diffuser

☐ **Option 25**
Individually Packaged Units

☐ **Option 26**
Individually Tagged Units

☐ **Option 27**
Non-Standard Inlet Collars
And Dampers

HIGHER



☐ **Option 28**
Non-Standard Unit Height.
"K" Diffusers Only.



☐ **Option 29**
Internal Or External
Foil Faced Insulation

☐ **Option 30**
All Stainless Steel
Construction

☐ **Option 31**
All Aluminum
Construction

LOWER

To maintain KEESS' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.



Project	Location		
Engineer			
Architect	Dwg. No.	OPTIONS	
Contractor	Date	12/01	



KEES INCORPORATED
400 S. Industrial Dr.
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com

MODEL "K" RETURN AIR 1-Slot Model

DUCTED







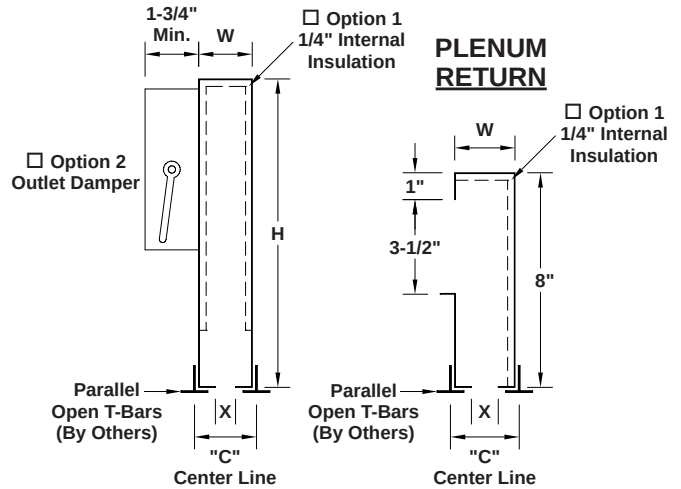
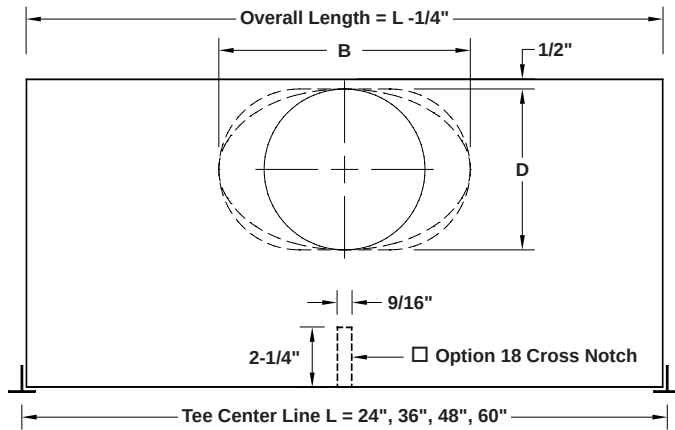


NOMINAL OUTLET SIZE	B	D	H
6" RD.	5-7/8"	5-7/8"	11-5/8"
8" RD.	7-7/8"	7-7/8"	
10" OV.	11-1/2"	8"	
12" SLOT	14-1/2"	8"	
12" OV.	13-7/8"	9-9/16"	13-5/8"
12" RD.	11-7/8"	11-7/8"	15-5/8"
PLENUM RETURN	-	-	8"

MODEL	SLOT WIDTH X	W	C
KR-50-1	1/2"	1-5/8"	1-7/8"
KR-75-1	3/4"	1-7/8"	2-1/8"
KR-100-1	1"	2-1/8"	2-3/8"
KR-150-1	1-1/2"	2-5/8"	2-7/8"

Material: 24 gauge zinc coated steel.
Finish: Diffuser face flat black.

ACCESSORY OPTIONS



Outlet Collar Location: Outlet collar may be offset for packaging purposes.

* Specify outlet side or side opposite outlet if ordering Options 5, 8, or 10.

Quantity	Model	Length L	Height H	Outlet Size	Options	Tag

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project	Location		
Engineer			
Architect	Dwg. No.	Diff. KR-1	
Contractor	Date	05/10	





KEES INCORPORATED
400 S. Industrial Dr.
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com

MODEL "K" RETURN AIR

2-Slot Model


DUCTED

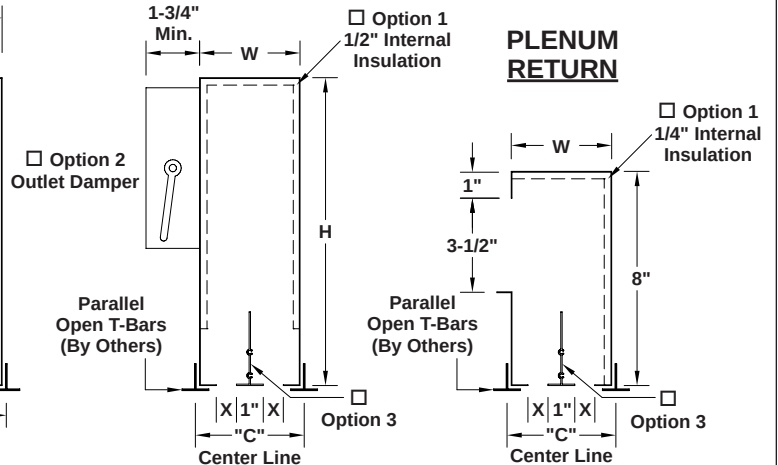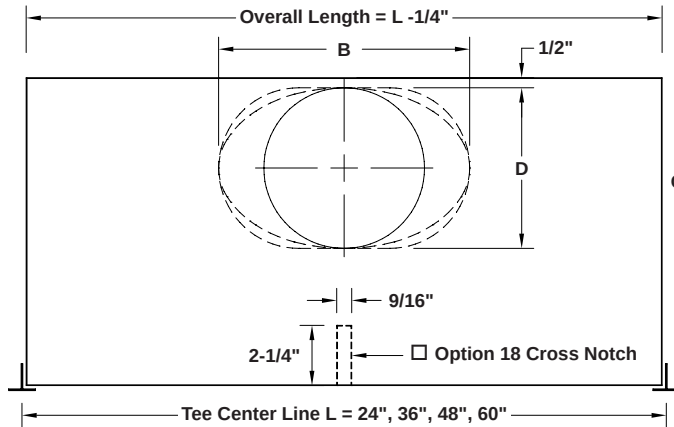


ACCESSORY OPTIONS

NOMINAL OUTLET SIZE	B	D	H
6" RD.	5-7/8"	5-7/8"	11-5/8"
8" RD.	7-7/8"	7-7/8"	
10" OV.	11-1/2"	8"	
12" SLOT	14-1/2"	8"	13-5/8"
12" OV.	13-7/8"	9-9/16"	15-5/8"
12" RD.	11-7/8"	11-7/8"	15-5/8"
PLENUM RETURN	-	-	8"


MODEL	SLOT WIDTH X	W	C
KR-50-2	1/2"	3-1/8"	3-3/8"
KR-75-2	3/4"	3-5/8"	3-7/8"
KR-100-2	1"	4-1/8"	4-3/8"
KR-150-2	1-1/2"	5-1/8"	5-3/8"




Option 3
Factory installed
Center T




Option 4
Slot provided in ends
to fit astride ceiling
grid T-bar (by others)




Option 5
One side T
furnished *




Option 6
2-slot one-way blow only -
T-extension is added to
fit over existing grid
T-bar (by others)
Slot provided in ends




Option 7
Both side T's
furnished




Option 8
One pair of
TC clips furnished *




Option 11
Frame
screwed onto
plenum lip using
pan head screws.
Off-white finish.
Shipped loose.



Option 12
Frame for concealed
fastening.
Off-white finish.
Shipped loose.
Field Drilled.



Option 9
Both pairs of
TC clips
furnished



Option 10
One pair of
TC clips and one
side T furnished *

Material: 24 gauge zinc coated steel.
Finish: Diffuser face flat black, tees are white.

Outlet Collar Location: Outlet collar may be offset for packaging purposes.

* Specify outlet side or side opposite outlet if ordering Options 5, 8, or 10.

Quantity	Model	Length L	Height H	Outlet Size	Options	Tag



To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project	Location		
Engineer			
Architect	Dwg. No.	Diff. KR-2	
Contractor	Date	05/10	



KEES INCORPORATED
400 S. Industrial Dr.
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com


MODEL "K" RETURN AIR 3-Slot Model

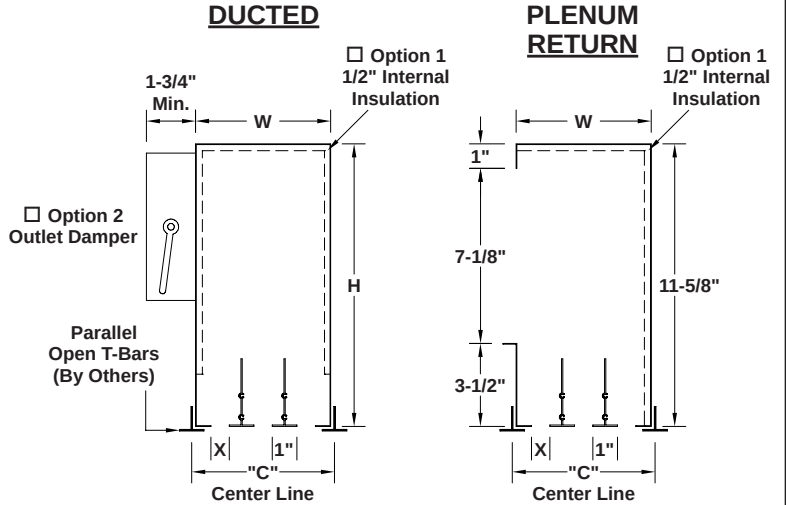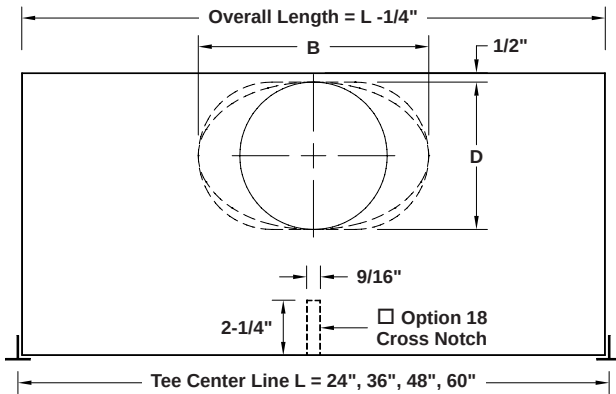


NOMINAL OUTLET SIZE	B	D	H
6" RD.	5-7/8"	5-7/8"	11-5/8"
8" RD.	7-7/8"	7-7/8"	
10" OV.	11-1/2"	8"	
12" SLOT	14-1/2"	8"	
10" RD.	9-7/8"	9-7/8"	13-5/8"
12" OV.	13-7/8"	9-9/16"	
12" RD.	11-7/8"	11-7/8"	15-5/8"
PLENUM RETURN	-	-	11-5/8"

MODEL	SLOT WIDTH X	W	C
KR-50-3	1/2"	4-5/8"	4-7/8"
KR-75-3	3/4"	5-3/8"	5-5/8"
KR-100-3	1"	6-1/8"	6-3/8"
KR-150-3	1-1/2"	7-5/8"	7-7/8"


ACCESSORY OPTIONS




☐ Standard
Two Center T's
No side T's or
clips furnished




☐ Option 5
One side T
furnished *




☐ Option 7
Both side T's
furnished




☐ Option 8
One pair of
TC clips
furnished *




☐ Option 9
Both pairs of
TC clips
furnished



☐ Option 10
One pair of
TC clips and one
side T furnished *



☐ **Option 11**
Frame
screwed onto
plenum lip using
pan head screws.
Off-white finish.
Shipped loose.



☐ **Option 12**
Frame for concealed fastening.
Off-white finish.
Shipped loose.
Field Drilled.

Material: 24 gauge zinc coated steel.
Finish: Diffuser face flat black, tees are white.

Outlet Collar Location: Outlet collar may be offset for packaging purposes.

* Specify outlet side or side opposite outlet if ordering Options 5, 8, or 10.

[illegible]



To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project			Location	 KEES INCORPORATED 400 S. Industrial Dr. Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com
Engineer				
Architect		Dwg. No.	Diff. KR-3	
Contractor		Date	05/10	



KEES INCORPORATED
400 S. Industrial Dr.
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com

MODEL "K" RETURN AIR 4-Slot Model

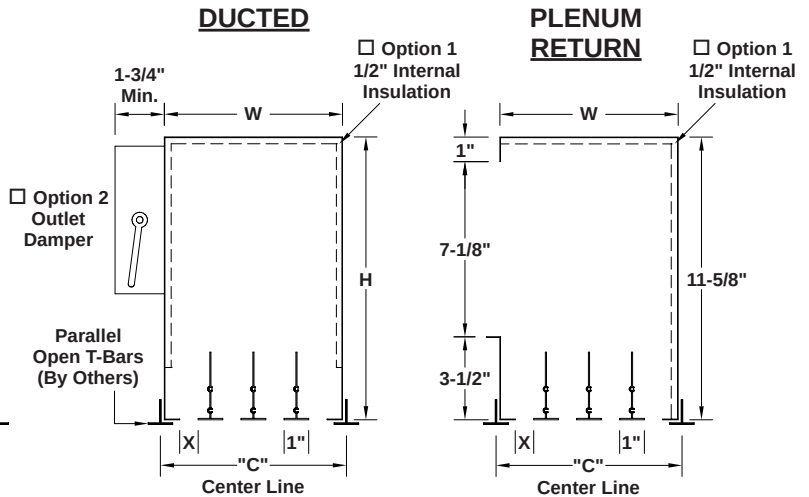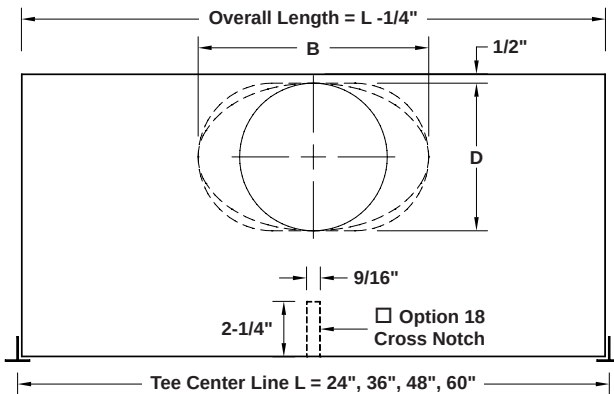


NOMINAL OUTLET SIZE	B	D	H
8" RD.	7-7/8"	7-7/8"	11-5/8"
10" OV.	11-1/2"	8"	13-5/8"
10" RD.	9-7/8"	9-7/8"	
12" SLOT	14-1/2"	8"	
12" OV.	13-7/8"	9-9/16"	
14" SLOT	16-1/8"	9-7/8"	
12" RD.	11-7/8"	11-7/8"	15-5/8"
PLENUM RETURN	-	-	11-5/8"

MODEL	SLOT WIDTH X	W	C
KR-50-4	1/2"	6-1/8"	6-3/8"
KR-75-4	3/4"	7-1/8"	7-3/8"
KR-100-4	1"	8-1/8"	8-3/8"
KR-150-4	1-1/2"	10-1/8"	10-3/8"

Material: 24 gauge zinc coated steel.
Finish: Diffuser face flat black, tees are white.

ACCESSORY OPTIONS

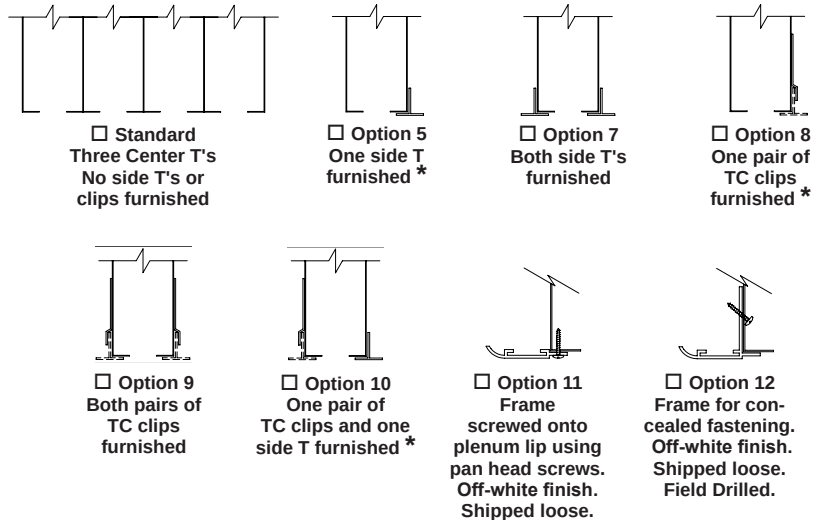

Outlet Collar Location: Outlet collar may be offset for packaging purposes.

* Specify outlet side or side opposite outlet if ordering Options 5, 8, or 10.

Quantity	Model	Length L	Height H	Outlet Size	Options	Tag



To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project				Location		
Engineer						 KEES INCORPORATED 400 S. Industrial Dr. Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com
Architect		Dwg. No.	Diff. KR-4			
Contractor		Date	05/10			



KEES INCORPORATED
 400 S. Industrial Dr.
 Elkhart Lake, WI 53020
 Phone: (920) 876-3391
 Fax: (920) 876-3065
 Website: www.kees.com

REGULAR CEILING ADJUSTABLE BLADE 1-Slot Model

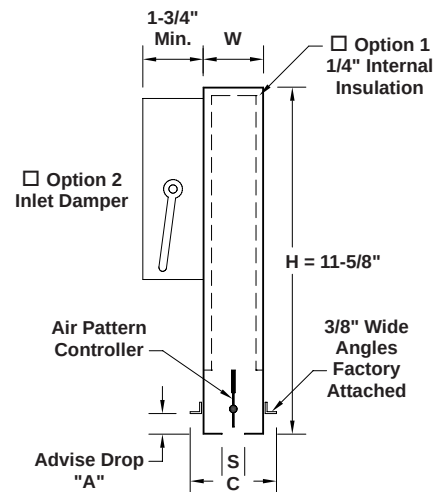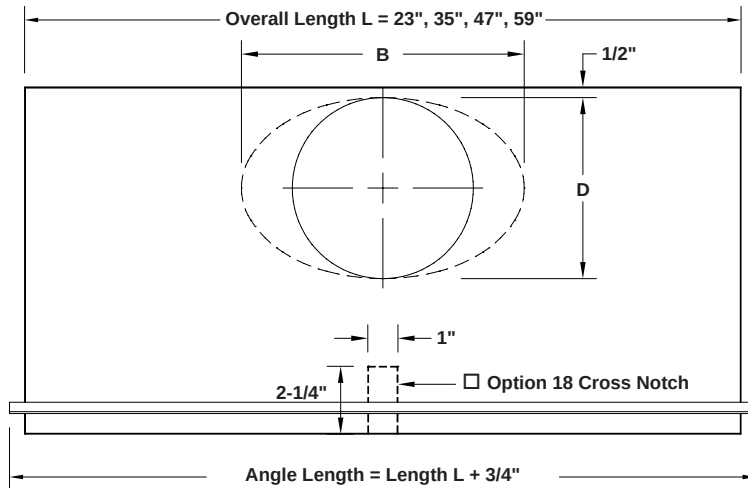

NOMINAL INLET SIZE	B	D	H
5" RD.	4-7/8"	4-7/8"	11-5/8"
6" RD.	5-7/8"	5-7/8"	
7" RD.	6-7/8"	6-7/8"	
8" RD.	7-7/8"	7-7/8"	
10" OV.	11-1/2"	8"	

MODEL	SLOT WIDTH S	W	C
K-50-1	1/2"	1-5/8"	2-3/8"
K-75-1	3/4"	1-7/8"	2-5/8"
K-100-1	1"	2-1/8"	2-7/8"
K-150-1	1-1/2"	2-5/8"	3-3/8"

Material: 24 gauge zinc coated steel. Pattern controller extruded aluminum with felt wiper seal.



Finish: Diffuser face and body ends are white. Pattern controller is flat black.

Quantity	Model	Length L	Height H	Inlet Size	Drop "A"	Options	Tag

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project			Location	 KEES INCORPORATED 400 S. Industrial Dr. Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com
Engineer				
Architect	Dwg. No.	SD-Diff.-TKS-1		
Contractor	Date	05/10		

REGULAR CEILING ADJUSTABLE BLADE 2-Slot Model

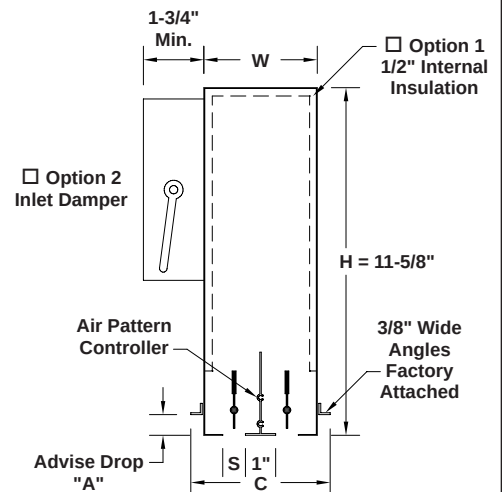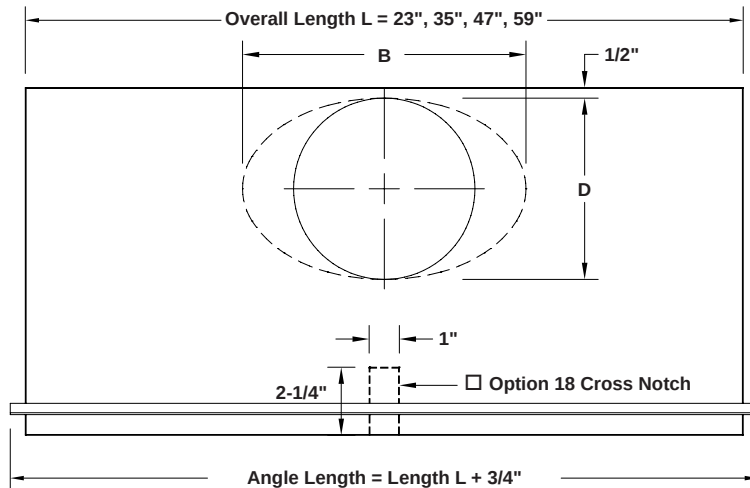

NOMINAL INLET SIZE	B	D	H
5" RD.	4-7/8"	4-7/8"	11-5/8"
6" RD.	5-7/8"	5-7/8"	
7" RD.	6-7/8"	6-7/8"	
8" RD.	7-7/8"	7-7/8"	
10" OV.	11-1/2"	8"	

MODEL	SLOT WIDTH S	W	C
K-50-2	1/2"	3-1/8"	3-7/8"
K-75-2	3/4"	3-5/8"	4-3/8"
K-100-2	1"	4-1/8"	4-7/8"
K-150-2	1-1/2"	5-1/8"	5-7/8"

Material: 24 gauge zinc coated steel. Pattern controller extruded aluminum with felt wiper seal.

Finish: Diffuser face, body ends and tees are white. Pattern controller is flat black.

Quantity	Model	Length L	Height H	Inlet Size	Drop "A"	Options	Tag

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project				Location	 KEES INCORPORATED 400 S. Industrial Dr. Elkhart Lake, WI 53020 Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com
Engineer					
Architect		Dwg. No.	SD-Diff.-TKS-2		
Contractor		Date	05/10		