
MODEL SDPC PERFORATED SECURITY CEILING DIFFUSER WITH ADJUSTABLE CURVED BLADE PATTERN CONTROL

Complies with NIC recommendations and California BoP Title 24

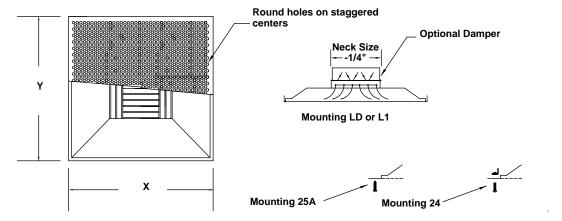

Face: 18 ga. paint lock steel. ☐ **LD.** Bend out tabs to lock under security ceiling grid bulb. Hole Pattern: 3/16" round holes on 1/4" staggered centers. Diffuser: 24 ga. steel plenum with aluminum adjustable curved Advise: blade pattern controllers. Round or square neck. Ceiling Manufacturer _ Finish: Two part polyurethane. White. Ceiling Model: □ L1. Lay-in for t-bar grid ceilings. **REQUIRED CONSTRUCTION:** Fac

STANDARD CONSTRUCTION

Но

Finish:

ce Material:	18 ga. paint lock steel (Std.) 16 ga. paint lock steel 14 ga. paint lock steel (Std. Opt. 24 & 25 only) Other	25A. Surface mount with countersunk screw holes in face 10" o.c. with #10 x 2" torx security sheet metal screws for hard ceilings. Diffuser tack welded to back of 14 ga. steel face plate. Other screw style/size/length
le Pattern:	3/16" round holes on 1/4" staggered centers (Std.) Other	24. Surface mount with countersunk screw holes in face 10" o.c 1" x 1" x 1/8" steel above ceiling angle frame with matching holes and foldover nuts. #10-24 x 2" long Torx security machine screws for 1-1/2" maximum ceiling thickness. Diffuser tack welded to back of 14 ga. steel

for 1-1/2" l ga. steel face plate. Other screw style/size/length ☐ White (Std.) ☐ Other **ACCESSORIES:**

MOUNTING OPTIONS:

☐ **16F.** Face operated steel opposed blade damper. For square necks only. ☐ **SXR.** Square to round transition, light ga. steel, loose for field **THROW PATTERNS** installation. Use when round connections and dampers are required. Advise round size 1 Way 2 Way 4 Way

3 Way SDPCR Return (no pattern controllers) □ Other Options: _

Qty.	Neck Size	X x Y (Face O.D.)	Ceiling Opening	Throw Pattern	Accessories	Damper	Mounting Option	Tag

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

	Location
Dwg. No.	SDPCw 10/04/2013
Date	
_	

Other Material:

Aluminum face (.063") and aluminum plenum.



KEES INCORPORATED Elkhart Lake, WI 53020

Phone: (920) 876-3391 Fax: (920) 876-3065 Website: www.kees.com