


# SEG-9 SECURITY GRILLE – SUPPLY OR RETURN

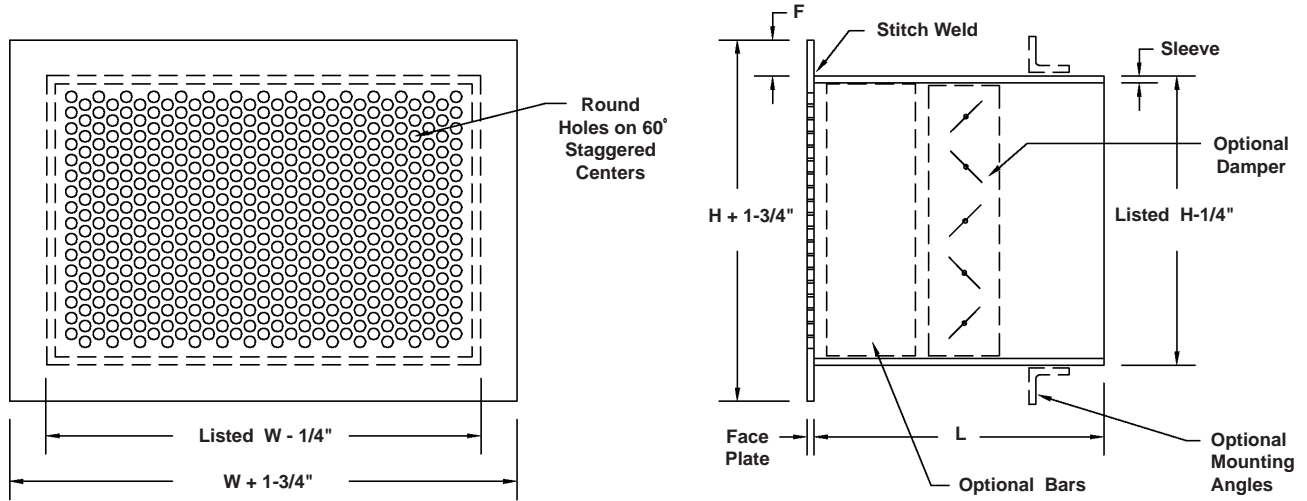

**STANDARD CONSTRUCTION**

**Face:** 3/16" thick steel stitch welded to sleeve. 1" face flange.  
**Hole Pattern:** 5/16" diameter holes on 7/16" staggered centers.  
**Sleeve:** 3/16" steel with continuously welded or formed seams.  
**Finish:** Two part polyurethane inside and out. White.

**REQUIRED CONSTRUCTION:**

- Face Material:**  3/16" steel (Std.)  
 10 ga. steel  
 12 ga. steel  
 Other \_\_\_\_\_
- Hole Pattern:**  5/16" dia. holes on 7/16" centers (Std.)  
 1/4" dia. holes on 3/8" centers  
 Other \_\_\_\_\_
- Flange "F":**  1" (Std.)  
 Other \_\_\_\_\_
- Sleeve Material:**  3/16" steel (Std.)  
 10 ga. steel  
 12 ga. steel  
 14 ga. steel  
 Other \_\_\_\_\_
- Finish:**  White (Std.)  
 Other \_\_\_\_\_
- Other Material:**  **SEG-9A** all aluminum construction  
 3/16" or 1/8" thick.  
 **SEG-9SS** all stainless steel construction  
 10 ga. type 304.

**MOUNTING OPTIONS:**

- 11A.** Two loose pieces of 1" x 1" x 3/16" mill finish steel angle loose for field welding. Length equal to longest side of grille. Other angle size \_\_\_\_\_
- 11B.** Rear angle frame of 1" x 1" x 3/16" mill finish steel completely assembled for field welding. Other angle size \_\_\_\_\_
- 12A.** Rear angle frame for bolting to sleeve. 1" x 1" x 3/16" steel with bolt holes 8" o.c. for 1/4" dia. bolts. No holes in sleeve. No bolts, nuts or washers. Other angle size \_\_\_\_\_
- 12B.** Same as **12A** with the addition of bolt holes in sleeve. (Advise wall or ceiling thickness). Other angle size \_\_\_\_\_
- 23.** Masonry anchors: 1/2" x 3" anchors 16" o.c., one per side minimum, welded to sleeve exterior. Other size or spacing \_\_\_\_\_
- 24.** Countersunk screw holes in face 10" o.c. with #10-24 x 2" long Torx security machine screws for 1-1/2" maximum ceiling thickness. 1" x 1" x 1/8" steel angle frame with matching holes and foldover nuts Requires 1-1/2" flange.
- 25.** Countersunk screw holes in face 10" o.c. with #10 x 1-1/2" long Torx security sheet metal screws. Other screw length \_\_\_\_\_

**ACCESSORIES:**

- 16F.** Face operated opposed blade damper tack welded into sleeve. Dampers are adjustable using flat bladed screwdriver.
- 16R.** Rear operated opposed blade damper tack welded into sleeve. Dampers are adjustable using flat bladed screwdriver.
- 21.** 2-1/2" x 3/8" hot rolled steel vertical security bars 4" o.c., welded to sleeve.
- Other:** \_\_\_\_\_

Qty.	Listed Size		Sleeve O.D.		Masonry Opening		Sleeve Length L	Wall / Ceiling Thickness	Accessories	Mounting Option	Tag
	W	H	W	H	W	H					

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

<b>Project</b>				<b>Location</b>						
<b>Architect / Engineer</b>				<p><b>KEES INCORPORATED</b>                  Elkhart Lake, WI 53020                  Phone: (920) 876-3391                  Fax: (920) 876-3065                  Website: www.kees.com</p>						
<b>Contractor</b>			<b>Dwg. No.</b>					SEG-9w 05/21/08		
<b>Representative</b>			<b>Date</b>							