

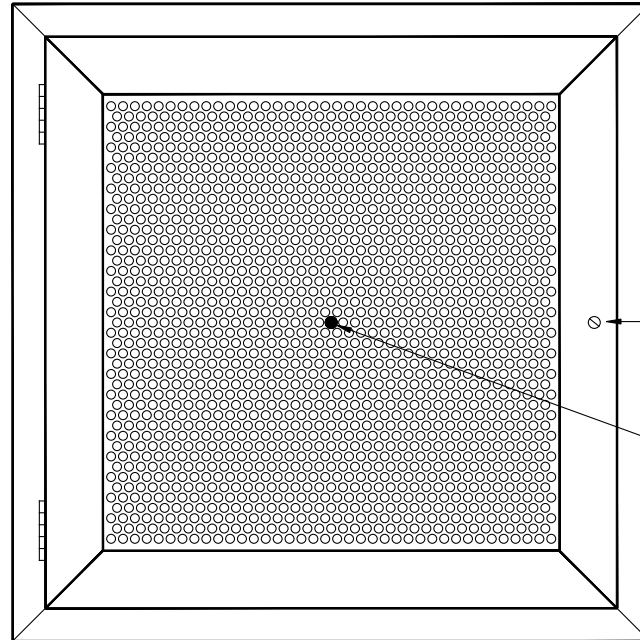


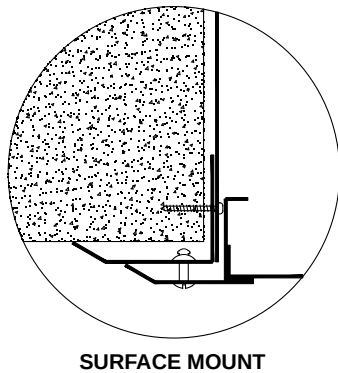

STAINLESS STEEL LAMINAR FLOW DIFFUSER - MODEL LA


304 S.S. (Std.) 316 (Opt.) With Satin Polish (White Powder Coat Opt.)

Available Perforations: 3/32" Holes on 1/4" Centers - 13% F.A. (Std. Capacity)
 3/32" Holes on 3/16" Centers - 23% F.A. (Opt. Medium Capacity)
 3/16" Holes on 5/16" Centers - 33% F.A. (Opt. High Capacity)

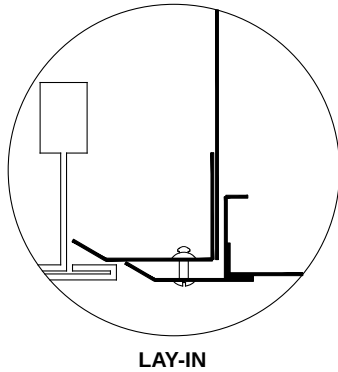

1/4 Turn Fastener

Access Hole For
Deflector Disk With
Plug Button

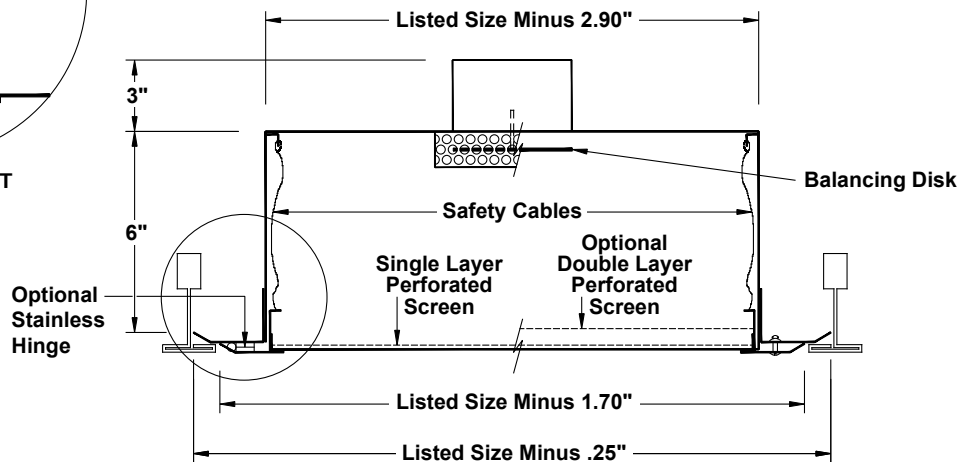

REMOVABLE WITH SAFETY CABLE STANDARD, OPTIONAL HINGED FACE AVAILABLE ON UNITS 24" WIDE AND LARGER

Qty.	Listed Size	Neck Size		Face		Capacity	Screen		Type S.S.		Finish	Tag
		Round	Sq./Rect.	Remov.	Hinged		Single	Double	304	316		

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project				Location	
Engineer					
Architect		Dwg. No.		SD-SSLA	
Contractor		Date		08/15	



KEES INCORPORATED
 400 S. Industrial Dr.
 Elkhart Lake, WI 53020
 Phone: (920) 876-3391
 Fax: (920) 876-3065
 Website: www.kees.com