




MODEL NTS ROOF CURBS




Modular Roof Curb and Support Legs Arrangement A1



Exhaust Fan Dimensions

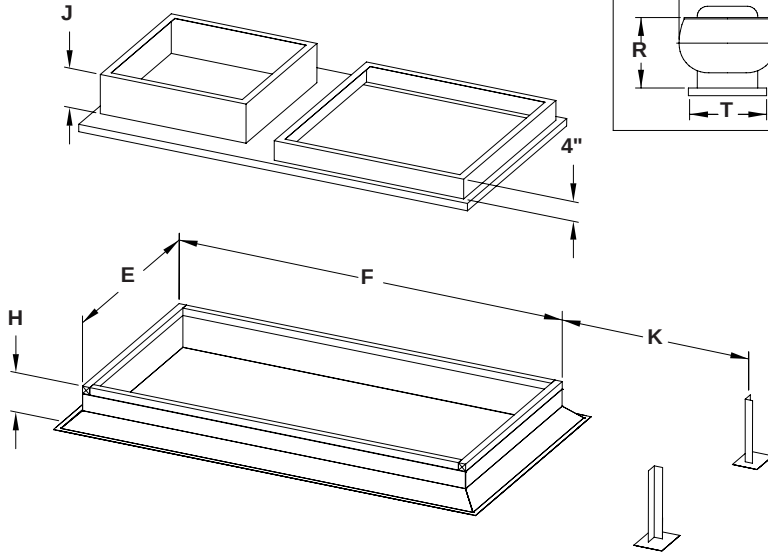

Plan View of Curb Cap

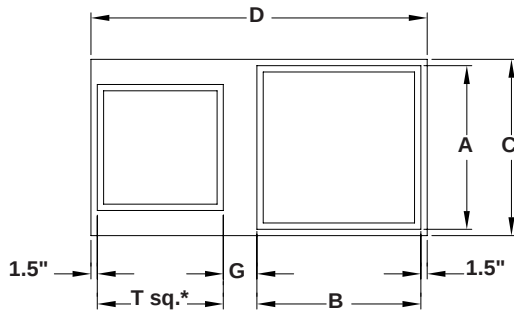


* See Note 4


$$\begin{aligned} C &= A+3" \text{ or } T+3" \text{ (largest)} \\ D &= B+G+T+3" \\ E &= C-1" \\ F &= D-1" \\ G &= \left(\frac{S-T}{2}\right)+3" \\ J &= 40"-H-R \text{ (4" min.)} \end{aligned}$$

Select One Roof Curb Model

☐ Model #1




☐ Model #3



Select One Housing Arrangement


Blower + Filter + Intake

☐ H1




Blower + Intake with Filters

☐ H2





Blower + Extended Intake

☐ H4



Pitch - (1 or 2-way)



OPTIONS:

-07	Wood Nailer - Treated	-16	One Way Pitch
-10	Aluminum Construction	-17	Two Way Pitch
-11	1/4" Neoprene Gasket	-18	Burglar Bars
-12	Inner Liner	-19	Damper Shelf

NOTES:

- Standard construction - 18 gauge galvanized with fiberglass insulation.
- See reverse side for Curb Arrangements A2, A3 & A4.
- Support legs are not required with Housing Arrangement H2.
- Dimension T is the actual exhaust fan curb cap I.D.. KEES will undersize by 1/2".
- To meet NFPA 96 requirements the SF intake and EF discharge must have a 10 foot separation (i.e. supply fan overall length plus dimension G ≥ 120").

Qty.	Fan Size (NTS)	A	B	C	D	E	F	G	H	J	K	Exhaust Fan Make & Model or R, S and T	Options	Tag
	-109/110	31.50	31.50								48.00			
	-112/115	39.50	39.50								48.00			
	-118/120	51.00	55.75								48.00			
	-218/220	99.50	55.75								48.00			

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.


Project		Location	
Engineer			
Architect		Dwg. No.	SD-NTS-CURB
Contractor		Date	06/03




KEES INCORPORATED
 400 S. Industrial Dr.
 Elkhart Lake, WI 53020
 Phone: (920) 876-3391
 Fax: (920) 876-3065
 Website: www.kees.com

MODEL NTS ROOF CURBS


Roof Curb and Support Legs Arrangement A2

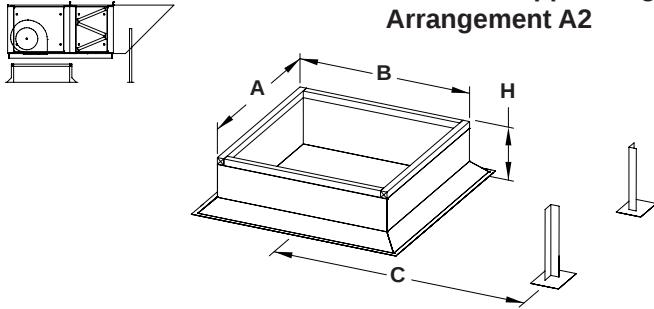


Support Rails Arrangement A3

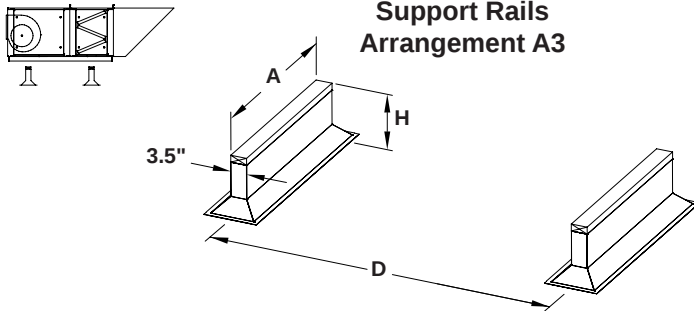

Full Perimeter Roof Curb Arrangement A4

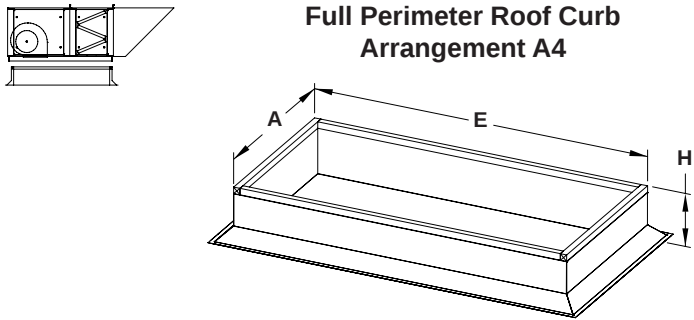


Select One Roof Curb Model

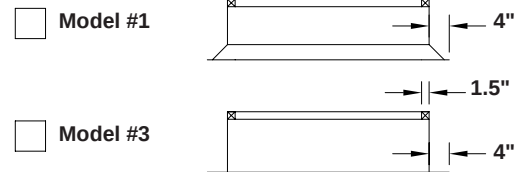


Select One Housing Arrangement


Blower + Filter + Intake





Blower + Intake with Filters



Blower + Extended Intake



Pitch - (1 or 2-way)

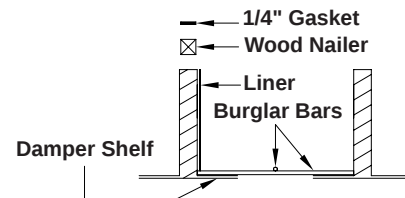

OPTIONS:

-07	Wood Nailer - Treated	-16	One Way Pitch
-10	Aluminum Construction	-17	Two Way Pitch
-11	1/4" Neoprene Gasket	-18	Burglar Bars
-12	Inner Liner	-19	Damper Shelf

NOTES:

1. Standard construction - 18 gauge galvanized with fiberglass insulation.
2. See reverse side for Curb Arrangement A1.
3. Curb Arrangement A2 - support legs not required with Housing Arrangement H2.
4. Curb Arrangement A3 and A4 - only available with Housing Arrangement H1.

Qty.	Fan Size (NTS)	Housing	Curb Arrangement A2				Curb Arrangement A3			Curb Arrangement A4			Options	Tag
			A	B	C	H	A	D	H	A	E	H		
	-109/110	#1	31.00	31.00	63.50		31.00	36.00		31.00	59.00			
	-112/115	#2	39.00	39.00	68.50		39.00	42.00		39.00	67.75			
	-118/120	#3	50.50	55.25	76.00		50.50	52.00		50.50	83.50			
	-218/220	#4	99.00	55.25	76.00		99.00	52.00		99.00	83.50			

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project		Location	
Engineer			
Architect		Dwg. No.	SD-NTS-CURB
Contractor		Date	06/03



KEES INCORPORATED
 400 S. Industrial Dr.
 Elkhart Lake, WI 53020
 Phone: (920) 876-3391
 Fax: (920) 876-3065
 Website: www.kees.com